

1 3GPP2 X.S0013-003-0
2 Version 2.0
3 Version Date: July 2005
4
5



3RD GENERATION
PARTNERSHIP
PROJECT 2
"3GPP2"

6 All-IP Core Network Multimedia Domain

7
8 **IP Multimedia (IMS) session handling;**
9 **IP Multimedia (IM) Call Model;**
10 **Stage 2**
11
12
13
14
15
16
17
18
19
20

COPYRIGHT NOTICE

3GPP2 and its Organizational Partners claim copyright in this document and individual Organizational Partners may copyright and issue documents or standards publications in individual Organizational Partner's name based on this document. Requests for reproduction of this document should be directed to the 3GPP2 Secretariat at secretariat@3gpp2.org. Requests to reproduce individual Organizational Partner's documents should be directed to that Organizational Partner. See www.3gpp2.org for more information.

21
22
23
24
25

1
2 **All-IP Core Network Multimedia Domain**
3 **IP Multimedia Subsystem – IP Multimedia Call Model; Stage 2**
4

5 **Contents**
6

7 | Foreword [vii](#)
8 | Revision History [vii](#)
9 | 1 Scope 1
10 | 2 References 1
11 | 3 Definitions and abbreviations 2
12 | 3.1 Definitions 2
13 | 3.2 Abbreviations 3
14 | 4 Architecture and information flows for IM multimedia session 4
15 | 4.1 Architecture for a mobile originated IP multimedia session 4
16 | 4.2 Architecture for a mobile terminated IP multimedia session 4
17 | 4.3 Information flow for a mobile originated IP multimedia session 4
18 | 4.4 Information flow for retrieval of routing information for mobile terminated IP multimedia
19 | session 4
20 | 4.5 Information flow for a mobile terminated IP multimedia session 4
21 | 5 Functional requirements of network entities 5
22 | 5.1 Architecture for service provision for IP multimedia subsystem 5
23 | 5.2 Service interaction with IP multimedia subsystem 6
24 | 6 Functional requirements of serving CSCF 9
25 | 6.1 Modes of operation of the S-CSCF 9
26 | 6.1.1 General overview of functional models and modes of operation of the S-CSCF 9
27 | 6.2 Interfaces defined for S-CSCF 10
28 | 6.2.1 S-CSCF – CSCF (Mw) interface 10
29 | 6.2.2 S-CSCF – Application Server (ISC) interface 10
30 | 6.2.3 S-CSCF – HSS (Cx) interface 10
31 | 6.2.4 S-CSCF – MRFC (Mr) Interface 10
32 | 6.2.5 S-CSCF – IP Multimedia Network (Mm) interface 10
33 | 6.3 Handling of SIP registration 10
34 | 6.4 Handling of mobile originating requests 11
35 | 6.5 Handling of mobile terminating requests 12
36 | 6.5.1 Handling of mobile terminating requests, registered user 12
37 | 6.5.2 Handling of mobile terminating requests, unregistered user 12
38 | 6.6 Handling of IP multimedia session release requests 12
39 | 6.6.1 S-CSCF proxying release request 13
40 | 6.6.2 S-CSCF initiating release request 13
41 | 6.7 Handling of subscription and notification 14
42 | 6.8 S-CSCF handling IMS accounting 14

1	6.9	Description of subscriber data	15
2	6.9.1	Application Server subscription information	15
3	6.9.2	Filter Criteria	15
4	6.9.3	Authentication data	16
5	7	Functional requirements of HSS	16
6	7.1	Subscriber data related storage requirements for HSS	16
7	7.2	Interfaces defined for HSS	16
8	7.2.1	HSS – CSCF (Cx) interface	16
9	7.2.2	HSS - Application Server (Sh) interface	16
10	7.2.3	Void	16
11	7.2.4	Void	16
12	7.3	Procedures during IP multimedia registration	16
13	7.4	Procedures during IP multimedia sessions	16
14	8	Functional requirements of the MRFC	17
15	8.1	Functionality of the MRFC	17
16	8.1.1	Overview of MRFC Functionality	17
17	8.1.2	Tones and announcements	17
18	8.1.3	Ad hoc conferences (multiparty calls)	18
19	8.1.4	Transcoding	18
20	8.2	Interfaces defined for MRFC	18
21	8.2.1	MRFC – S-CSCF (Mr) interface	18
22	9	Generic IP multimedia session handling for SIP Application Servers	19
23	9.1	Architecture	19
24	9.1.1	Modes of operation between Application Server and S-CSCF	20
25	9.2	Interfaces defined for a SIP Application Server	22
26	9.2.1	S-CSCF – Application Server (ISC) interface	22
27	9.2.2	Application Server – HSS (Sh) interface	22
28	9.3	Description of Application Server related subscriber data	22
29	9.3.1	Application server subscription information	22
30	9.4	Procedures for multimedia session handling with a SIP based Application Server	23
31	9.4.1	Application Server handling of mobile originating requests	23
32	9.4.2	Application Server handling of mobile terminating requests	23
33	9.4.3	Application Server handling of SIP registration	23
34	9.4.4	Application Server handling of IP multimedia session release requests	24
35	9.4.5	Application server handling of IP multimedia accounting	25
36	10	Void	25
37	11	IP multimedia session handling with an OSA-Service Capability Server	25
38	12.	IP multimedia session handling with an Charging Server	26
39	Annex A (informative): Scalability and deployment considerations for IP multimedia service provision		
40		27
41	Annex B (informative): Information flows for example services		29
42	B.1	Call forwarding example	29
43	B.1.1	Call forwarding through Application Servers	29
44	B.1.1.1	Service activation and programming	30
45	B.1.1.2	Service invocation and control	30
46	B.1.2	Assumptions	31

1	B.1.3	UE redirect based call flows	31
2	B.1.4	S-CSCF based redirect call flows	32
3	B.2	Announcement, conferencing and transcoding examples using MRFC	34
4	B.2.1	Example information flow for a mobile originated IP multimedia session that results in playing 5 an announcement	34
6	B.2.2	Example information flow for a mobile originated IP multimedia ad hoc conferencing session 7 (multiparty call)	36
8	B.2.3	Example information flows for a mobile originated IP multimedia session that requires 9 transcoding	38
10	B.3	Example information flows for a voicemail service	42
11	B.3.1	User out of coverage message recording	42
12	B.3.2	User IMS registers voice mail service plays back messages	44
13	Annex C (informative):	Example for Initial filter criteria triggering	47
14			

1
23 **Foreword**

4 This document contains portions of material copied from 3GPP document number(s) TS 23.218. The copyright
 5 on the 3GPP document is owned by the Organizational Partners of 3GPP (ARIB - Association of Radio
 6 Industries and Businesses, Japan; CCSA, the China Communications Standards Association, China; ETSI –
 7 European Telecommunications Standards Institute; ATIS, USA; TTA - Telecommunications Technology
 8 Association, Korea; and TTC – Telecommunication Technology Committee, Japan), which have granted
 9 license for reproduction and for use by 3GPP2 and its Organizational Partners
 10

11 **Revision History**

12

Revision	Changes	Date
0, version 1	Initial Publication	December 2003
0, version 2.0	First Point Release	July 2005

13

1 Scope

2 The present document specifies the IP Multimedia (IM) Call Model for handling of an IP multimedia
 3 session origination and termination for an IP Multimedia subscriber.
 4 The present document includes interactions between an Application Server and IP multimedia sessions.
 5 The IP Multimedia (IM) Subsystem stage 2 is specified [3] and the stage 3 for the IP multimedia call
 6 control based on SIP and SDP is specified in [5].

7 2 References

8 The following documents contain provisions which, through reference in this text, constitute provisions of
 9 the present document.

- 10 • References are either specific (identified by date of publication, edition number, version number,
 11 etc.) or non-specific.
- 12 • For a specific reference, subsequent revisions do not apply.
- 13 • For a non-specific reference, the latest version applies.

- 14
- 15 [1] Void.
- 16 [2] Void
- 17 [3] 3GPP2 X.S0013-002: " IP multimedia subsystem; Stage 2".
- 18 [4] Void
- 19 [5] 3GPP2 X.S0013-004: "IP multimedia call control protocol based on SIP and SDP; stage 3".
- 20 [6] IETF RFC 3261: "SIP: Session Initiation Protocol".
- 21 [7] 3GPP2 X.S0017: "Open Service Access (OSA); Application Programming Interface (API) ".
- 22 [8] 3GPP2 X.S0013-005: "IP Multimedia (IM) Subsystem Cx Interface; Signalling flows and message
 23 contents".
- 24 [9] Void
- 25 [10] Void
- 26 [11] 3GPP2 S.R0086-A v1.0: "3GPP2 IMS Security Framework".
- 27 [12] Void
- 28 [13] IETF RFC 3265: "Session Initiation Protocol (SIP) Event Notification".
- 29 [14] Void
- 30 [15] IETF RFC 3264: "An Offer/Answer Model with Session Description Protocol".
- 31 [16] Void
- 32 [17] 3GPP2 X.S0013-006: "Cx Interface based on the Diameter protocol".
- 33 [18] 3GPP2 X.S0013-010: "IP Multimedia Subsystem (IMS) Sh Interface; Signalling flows and message
 34 contents".
- 35 [19] 3GPP2 X.S0013-011: "Sh Interface based on the Diameter protocol".
- 36 [20] 3GPP2 X.S0013-007: " Accounting Architecture and stage 2 Description".
- 37 [21] 3GPP2 X.S0013-008: " IP Multimedia subsystem Accounting stage 3".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Application Server Incoming Leg Control Model (AS-ILCM): models AS behavior for handling SIP information for an incoming leg.

Application Server information (AS-info): AS-info contains individualized information concerning one particular Application Server entry.

This information contains e.g. Application Server Address (6.9.2.1) and it's corresponding Default IP Multimedia Handling information (6.9.2.2).

Application Server Outgoing Leg Control Model (AS-OLCM): models AS behaviour for handling SIP information for an outgoing leg.

Combined ILSM OLSM – Incoming/outgoing Leg State Model: models the behaviour of an S-CSCF for handling SIP messages on an incoming and outgoing session leg.

Filter Criteria (FC): the information which the S-CSCF receives from the HSS or the AS that defines the relevant SPTs for a particular application.

They define the subset of SIP requests received by the S-CSCF that should be sent or proxied to a particular application.

Incoming Leg Control Model (ILCM): models the behaviour of an S-CSCF for handling SIP information sent to and received from an AS for an incoming session leg.

Initial Filter Criteria (iFC): filter criteria that are stored in the HSS as part of the user profile and are downloaded to the S-CSCF upon user registration.

They represent a provisioned subscription of a user to an application.

Initial Request: a SIP request that either initiates the creation of a new dialog or is part of a standalone transaction.

IP Multimedia session: IP Multimedia session and IP Multimedia call are treated as equivalent in the present document.

IP Transport Subsystem: refers to any collection of network entities that provides the underlying IP transport for use to provide connectivity to or between IMS entities.

Outgoing Leg Control Model (OLCM): models the behavior of an S-CSCF for handling SIP information received from and sent to an AS for an outgoing session leg.

Private User Identity: a unique global identity defined by the Home Network Operator, as defined in [3].

Public User Identity: the public user identity/identities are used by any user for requesting communications to other users and are in the form of a SIP URI or TEL URL as defined in [3].

Service Point Trigger (SPT): a point in the SIP signaling that may cause the S-CSCF to send/proxy the SIP message to an SIP AS or an OSA SCS.

The subset of all possible SPTs which are relevant to a particular application are defined by means of Filter Criteria.

Service Platform Trigger Points (STP): the points in the SIP signaling that instruct the SIP AS and OSA SCS to trigger the service logic.

1
2 **Subsequent Filter Criteria (sFC):** filter criteria that are signaled from the SIP AS or the OSA SCS to the
3 S-CSCF.

4 They allow for dynamic definition of the relevant SPTs at application execution time.
5

6 **Subsequent Request:** a SIP request which is part of an existing dialog. This also includes target refresh
7 requests as defined in RFC 3261 [6].
8

9 **Standalone Transaction:** a SIP transaction that is not part of an existing dialog and does not initiate the
10 creation of a new dialog.

11 3.2 Abbreviations

12 For the purposes of the present document, the following abbreviations apply:

13	API	Application Programming Interface
14	AS	Application Server
15	AS-ILCM	Application Server Incoming Leg Control Model
16	AS-OLCM	Application Server Outgoing Leg Control Model
17	B2BUA	Back-to-Back User Agent
18	ACF	Accounting Collection Function
19	CF	Call Forwarding
20	CFonCLI	Call Forwarding on Calling Line Identification
21	CGI	Common Gateway Interface
22	CPL	Call Processing Language
23	CLI	Calling Line Identification
24	CSCF	Call Session Control Function
25	ECF	Event Charging Function
26	FC	Filter Criteria
27	HPLMN	Home PLMN
28	HSS	Home Subscriber Server
29	IETF	Internet Engineering Task Force
30	I-CSCF	Interrogating CSCF
31	ICID	IMS Charging ID
32	ICN	IP Connectivity Network
33	iFC	Initial Filter Criteria
34	ILCM	Incoming Leg Control Model
35	IM	IP Multimedia
36	IMS	IP Multimedia Subsystem
37	IOI	Inter Operator Identifier
38	IP	Internet Protocol
39	ISC	IP multimedia Service Control
40	MGCF	Media Gateway Control Function
41	MO	Mobile Originating
42	MRFC	Multimedia Resource Function Controller
43	MRFP	Multimedia Resource Function Processor
44	MT	Mobile Terminating
45	OLCM	Outgoing Leg Control Model
46	OSA	Open Service Access
47	PLMN	Public Land Mobile Network
48	P-CSCF	Proxy CSCF
49	RFC	Request For Comments
50	SCF	Session Charging Function
51	SCIM	Service Capability Interaction Manager
52	SCS	Service Capability Server
53	SDP	Session Description Protocol
54	sFC	Subsequent Filter Criteria

1	SIP	Session Initiation Protocol
2	S-CSCF	Serving CSCF
3	SPT	Service Point Trigger
4	STP	Service platform Trigger Points
5	UA	User Agent
6	UE	User Equipment
7	URI	Uniform Resource Identifier
8	URL	Uniform Resource Locator
9	XML	Extensible Markup Language

10 **4 Architecture and information flows for IM multimedia** 11 **session**

12 Clauses 4.1 and 4.2 show the architecture for handling a basic MO multimedia session and a basic MT
13 multimedia session. A basic mobile-to-mobile multimedia session is treated as the concatenation of a MO
14 multimedia session and a MT multimedia session.

15 Clauses 4.3, 4.4 and 4.5 show the information flows for handling a basic MO multimedia session and a
16 basic MT multimedia session.

17 **4.1 Architecture for a mobile originated IP multimedia session**

18 This is specified in [3].

19 **4.2 Architecture for a mobile terminated IP multimedia session**

20 This is specified in [3].

21 **4.3 Information flow for a mobile originated IP multimedia session**

22 The information flow for a MO multimedia session is specified in [3].

23 **4.4 Information flow for retrieval of routing information for mobile** 24 **terminated IP multimedia session**

25 The information flow for retrieval of routing information for a MT multimedia session is specified in [3].


26 **4.5 Information flow for a mobile terminated IP multimedia session**

27 The information flow for a MT multimedia session is specified in [3].

1

2 **5 Functional requirements of network entities**3 **5.1 Architecture for service provision for IP multimedia subsystem**

4

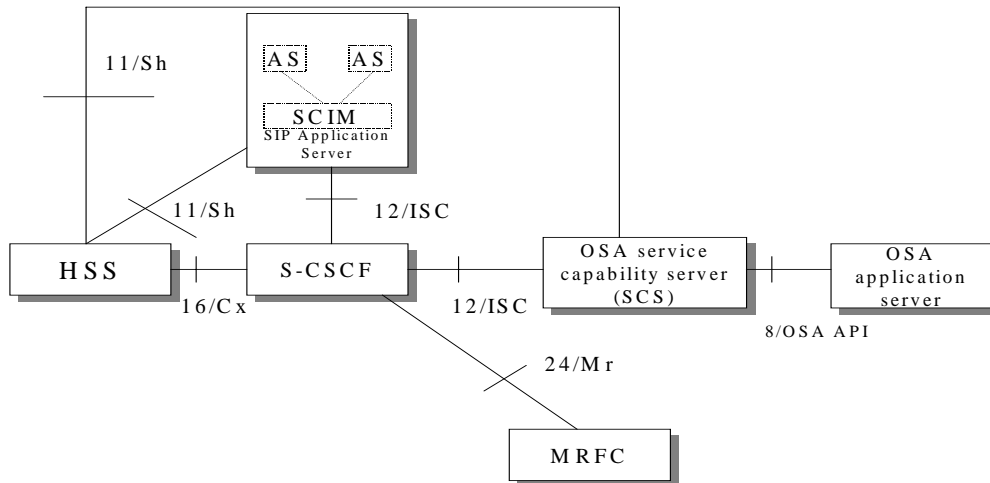

5

6 **NOTE: Not all interfaces shown are within the scope of this document.**

7

8 **Figure 5.1.1: Functional architecture for support of service provision for IP multimedia subsystem**

9

10 Figure 5.1.1 illustrates the architecture with the S-CSCF communicating to Application Servers via the IP
11 multimedia service control (ISC) interface. The Application Servers can be:

12

13 - SIP Application Servers - which may host and execute services. It is intended to allow the SIP
Application Server to influence and impact the SIP session on behalf of the services;

14

15 - the OSA service capability server (OSA SCS) which interfaces to the OSA framework Application
16 Server and which provides a standardized way for third party secure access to the IM subsystem.
17 The OSA reference architecture defines an OSA Application Server as an entity that provides the
18 service logic execution environment for client applications using the OSA API as specified in [7].
19 This definition of Application Server differs from the definition of Application Server in the context
20 of service provisioning for the IM subsystem, i.e. the entity communicating to the S-CSCF via the
ISC interface;

21

22 - in addition a specialized type of SIP Application Server, the service capability interaction manager
(SCIM) which performs the role of interaction management between other application servers.

23

24 All the Application Servers, (including the OSA SCS) behave as SIP application servers on the ISC
interface.

25

26 In addition the Application Servers can also interact with the MRFC via the S-CSCF (ISC and Mr
interfaces) in order to control Multimedia Resource Function processing.

5.2 Service interaction with IP multimedia subsystem

Service Point Triggers (SPTs) are those points in the SIP signalling on which Filter Criteria can be set. The following SPTs are defined:

- any initial known or unknown SIP method (e.g. REGISTER, INVITE, SUBSCRIBE, MESSAGE);
- presence or absence of any [known or unknown](#) header field;
- content of any [known or unknown](#) header field or Request-URI;
- direction of the request with respect to the served user – either mobile originated (MO) or mobile terminated (MT) to registered user; or mobile terminated to unregistered user;

NOTE 1: REGISTER is considered part of the Mobile Origination. [See \[5\] for further information about how to determine MO or MT.](#)

NOTE 2: The S-CSCF shall verify if the end user is barred before checking if any trigger applies for that end user.

- session description information.

A Filter Criteria triggers one or more SPTs in order to send the related request to one specific application server. The set of Filter Criteria that is stored for a service profile of a specific user is called "Application Server Subscription Information". In order to allow the S-CSCF to handle the different Filter Criteria in the right sequence, a priority shall be assigned to each of them. If the S-CSCF can not reach the AS, the S-CSCF shall apply the default handling associated with the trigger. This default handling shall be :

- to continue verifying if the triggers of lower priority in the list match; or
- to abandon verification of matching of the triggers of lower priority in the list; and to release the dialogue.

Therefore a Filter Criteria shall contain the following information:

- address of the Application Server to be contacted;
- priority of the Filter Criteria providing the sequence in which the criteria shall be applied;
- Trigger Points, ~~composed by 1 to n instances of which indicate the~~ Service Point Triggers (SPTs) ~~triggered by this Filter Criteria~~. The SPTs may be linked by means of logical expressions (AND, OR, NOT, etc.);
- default handling (as described above);
- optional Service Information that shall be added to the message body before it is sent to the AS

The same priority shall not be assigned to more than one initial Filter Criteria for a given end user.

The S-CSCF shall request from the HSS the relevant set of iFCs that applies to the end user (i.e., registered, unregistered, or both). If the S-CSCF has a set of iFCs that is deemed valid (e.g., from a previous request), the S-CSCF need not request a new set.


In the case that multiple Filter Criteria are sent from the HSS to the S-CSCF ~~when the S-CSCF receives a message via the Mw interface [3]~~, the S-CSCF shall check the filter criteria one by one according to their indicated priority, [when the S-CSCF receives a message via the Mw interface.](#)

[On reception of a REGISTER request, the S-CSCF shall send a third-party REGISTER request to each Application Server that matches the Filter Criteria sent from the HSS for the REGISTER event.](#)

1
2 On reception of any other request ~~+-~~ the S-CSCF shall:
3

- 4 1. set up the list of filter criteria for that request according to their priority – the sequence of the filter
5 criteria shall not be changed until the request finally leaves the S-CSCF via the Mw interface again;
- 6 2. parse the received request in order to find out the Service Point Triggers (SPTs) that are included in
7 it;
- 8 3. check whether the trigger points of the filter criteria with the next highest priority are matched by
9 the SPTs of the request and
 - 10 a) if it does not match the S-CSCF shall immediately proceed with step 4;
 - 11 b) if it matches the S-CSCF shall:
 - 12 i) add an indication to the request which will allow the S-CSCF to identify the message on the
13 incoming side, even if its dialog identification has been changed e.g. due to the AS
14 performing third party call control;
 - 15 ii) forward the request via the ISC interface to the AS indicated in the current filter criteria. The
16 AS then performs the service logic, may modify the request and may send the request back to
17 the S-CSCF via the ISC interface;
 - 18 iii) proceed with step 4 if the request was received again from the AS via the ISC interface;
- 19 4. repeat the above steps 2 and 3 for every filter criteria which was initially set up (in step 1) until the
20 last filter criteria has been checked;
- 21 5. route the request based on normal SIP routing behaviour.

22 If an Application Server decides to locally terminate a request and sends back a final response for that
23 request via the ISC interface to the S-CSCF, the S-CSCF shall abandon verification of the matching of the
24 triggers of lower priority in the list. The final response shall include the indicator defined in step 3 b) i)
25 above, so that the S-CSCF can correlate the messages.
26

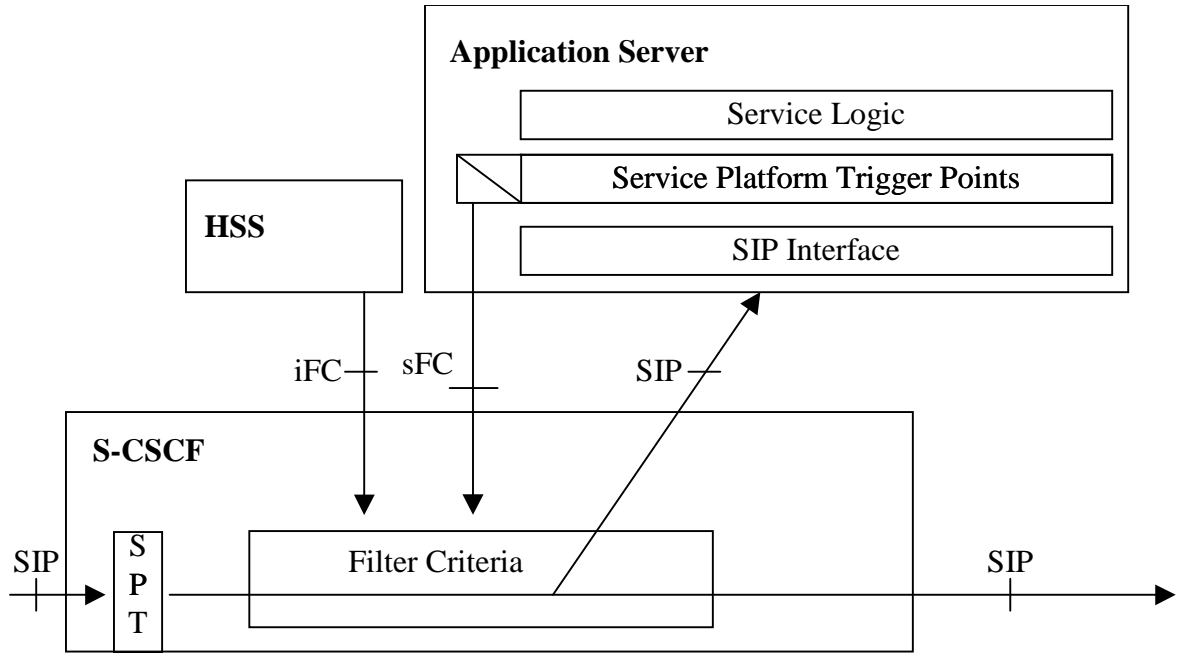

1
2

3

Figure 5.2.1: Application triggering architecture

4

Each invoked Application Server/service logic may decide not to be engaged with the invoked session by indicating that during the very first SIP transaction when the Record-Route/Route is generated for subsequent SIP requests. The denial shall mean that subsequent requests shall not be routed to such Application Servers/service logic any more during the lifetime of that session. Any Application Server, which has determined that it will not receive subsequent requests for a session cannot revoke this determination by means of Initial Filter Criteria (iFC).

10


NOTE: Care should be taken in design of the Initial Filter Criteria when designing services to avoid unintended loops being setup, where requests from an Application Server may be sent back to the same Application Server. This does not imply that it is not allowed for requests to be sent back to the same Application Server when that is intended behaviour as part of the design of the service and the Application Server is able to handle this correctly. Special care should be taken for the case when an Application Server may act as an originating UA or B2BUA and may originate an initial request causing evaluation of Initial Filter Criteria.

17

1 6 Functional requirements of serving CSCF

2 6.1 Modes of operation of the S-CSCF

3 6.1.1 General overview of functional models and modes of operation of the S-CSCF

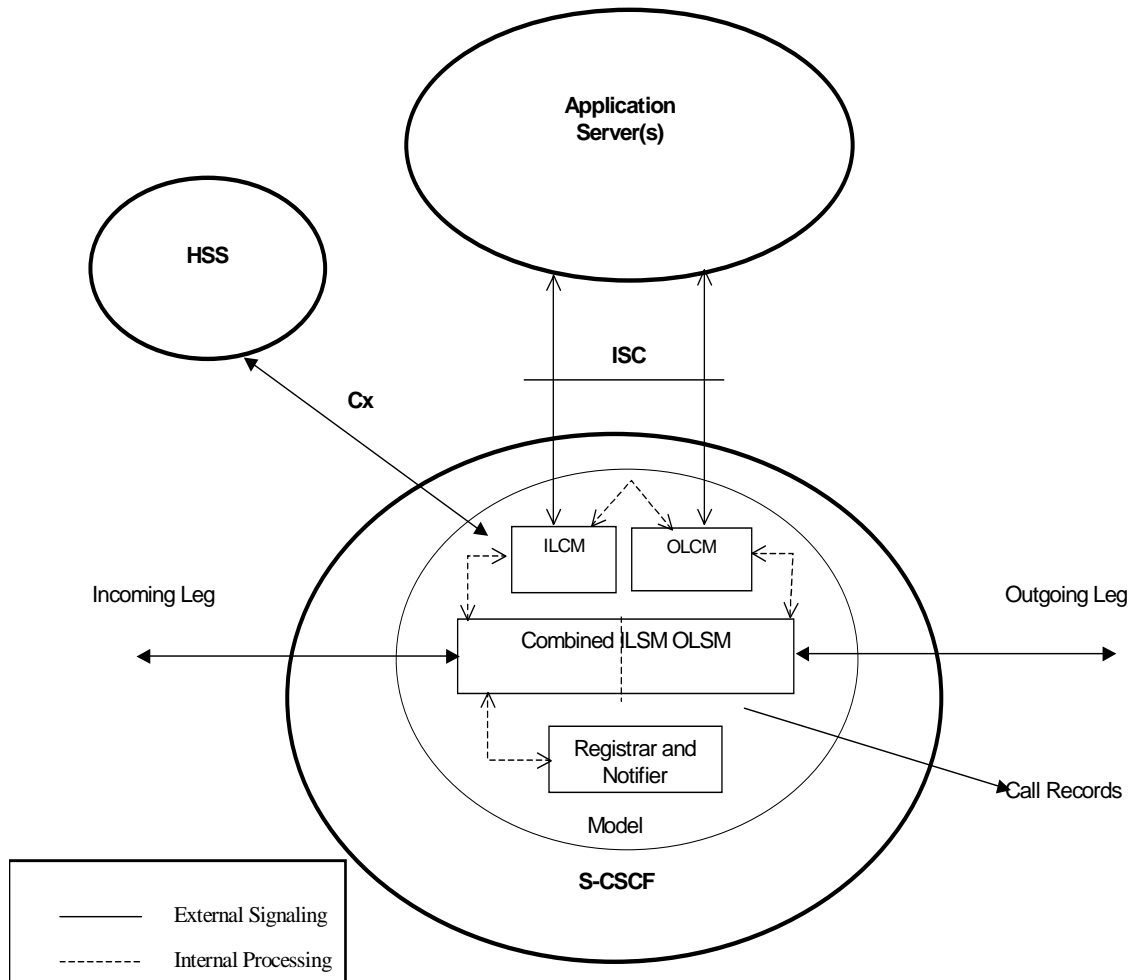

4
5

6 **Figure 6.1.1.1: S-CSCF functional model with incoming leg control and outgoing leg control**

8 Figure 6.1.1.1 identifies the components of a functional model of the S-CSCF.

9 **NOTE:** These components are defined only as a model of the expected behaviour of the S-CSCF and
10 are not intended to define or constrain the actual implementation.

11 The components include the Combined ILSM OLSM, the ILCM and OLCM and the Registrar and Notifier.
12 There is a single Combined ILSM OLSM, which shall be able to store session state information. It may act
13 on each leg independently, acting as a SIP Proxy, Redirect Server or User Agent dependant on the
14 information received in the SIP request, the filter conditions specified or the state of the session.
15 It shall be possible to split the application handling on each leg and treat each endpoint differently.
16 There is a single ILCM, which shall store transaction state information.
17 There is a single OLCM, which shall store transaction state information.

1 | The Registrar [and Notifier](#) component handles registration and subscription to and notification of
2 | registration events.
3 | ~~The Notifier handles subscription to and notification of events.~~

4 | **6.2 Interfaces defined for S-CSCF**

5 | **6.2.1 S-CSCF – CSCF (Mw) interface**

6 | The protocol used between two CSCFs is also based on Session Initiation Protocol, which is specified in
7 | [5].

8 | **6.2.2 S-CSCF – Application Server (ISC) interface**

9 | The protocol used between the S- CSCF and the Application Servers (ISC interface) is also based on
10 | Session Initiation Protocol, which is specified in [5].

11 | **6.2.3 S-CSCF – HSS (Cx) interface**

12 | This interface is used to send subscriber data to the S-CSCF; including Filter criteria, which indicates
13 | which SIP requests should be proxied to which Application Servers.
14 | The protocol used between the S-CSCF and HSS (Cx Interface) is specified in [8].

15 | **6.2.4 S-CSCF – MRFC (Mr) Interface**

16 | The protocol used between MRFC and S-CSCF is based on Session Initiation Protocol, which is specified
17 | in [5].
18

19 | **6.2.5 S-CSCF – IP Multimedia Network (Mm) interface.**

20 | The protocol used between S-CSCF and an IP multimedia network is based on Session Initiation Protocol,
21 | which is specified in [5].

22 | **6.3 Handling of SIP registration**

23 | Upon receiving the initial registration request from the user, the S-CSCF shall authenticate the user and
24 | upon receiving a subsequent registration request containing valid authentication credentials, request the
25 | HSS to send the relevant service profile(s) for the user’s subscription. More than one service profile may be
26 | sent, depending on configuration options for identifying implicitly registered public user identities. For
27 | further detailed information on registration, profile download and authentication procedures see [5] and
28 | [11].

29 | The initial filter criteria (subset of the profile) is stored locally at the S-CSCF, as specified in [5].

30 | The S-CSCF shall verify if the triggers match, from the highest to the lowest priority (see subclause 5.2).


31 | After a successfully authenticated registration, the S-CSCF shall download from the HSS all the implicitly
32 | registered public user identities associated with the registered public user identity. The S-CSCF shall then
33 | verify, in their order of priority, if the triggers downloaded from the HSS match. If the registration request
34 | from the user matches a trigger, the S-CSCF performs a third party registration to the application servers
35 | which are interested to be informed about the user registration event of these public user identities. This
36 | may trigger services to be executed by an AS.

37 | The important information carried in the third party REGISTER request is the public user identity, the S-
38 | CSCF address and the expiration time. It shall be possible based on operator configuration to use one of
39 | the implicitly registered public user identities as the public user identity in the To header of the third party
40 | REGISTER request sent to the Application Server. Additional application server specific data, which is
41 | associated with the Filter Criteria and obtained from the HSS, is added to the REGISTER request body.
42 | This data should include the private user identity for Application Servers as received from the HSS.

43 | This third party registration will include an expiration time that is equal to the expiration time sent to the
44 | UE by the S-CSCF in the 200 OK response to the incoming REGISTER request

45 | On receiving a failure response to one of the REGISTER requests, the S-CSCF shall apply the "default
46 | handling" related with the initial Filter Criteria’s trigger used (see subclauses 5.2, 6.9.2.2).

1 See figure 6.3.1:

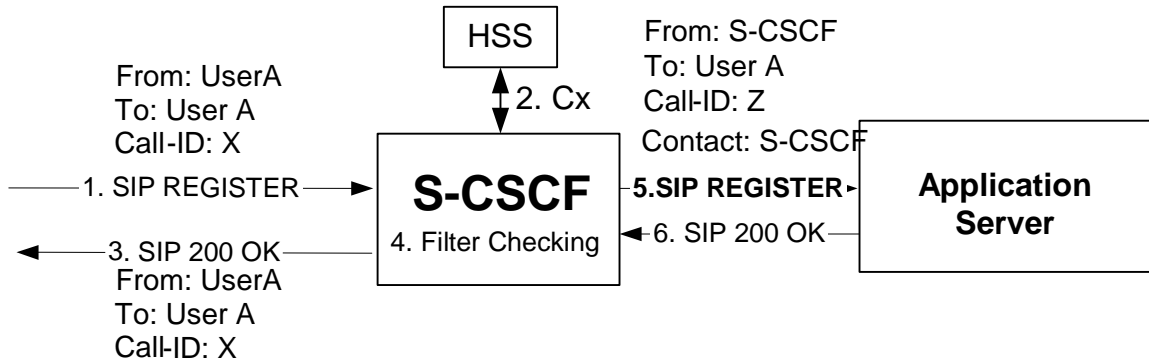

2
3

4 **Figure 6.3.1: S-CSCF handling registration**

5 Application Servers can in addition subscribe to the Public User Identity's Registration Event Package.
6 This provides a mechanism for the Application Server to discover all the implicitly registered public user
7 identities without requiring multiple Register requests to be sent to the Application Server. The S-CSCF
8 will send NOTIFY requests to the Application Server that has subscribed to the registration event package
9 for the registered public user identity.
10 More information on these procedures is contained in [5].

11 6.4 Handling of mobile originating requests

12 The S-CSCF shall verify if the public user identity is barred. If so, it shall respond with an error code and
13 stop further session processing.

14 The S-CSCF only looks for initial filter criteria when receiving an initial request.

15 The initial filter criteria (subset of the profile) has already been downloaded from the HSS and is stored
16 locally at the S-CSCF, as specified in [5].

17 When such a session request comes in, the S-CSCF shall first check [whether this is an originating request
18 or a terminating request its trigger points \(i.e. this is a mobile originating request or a mobile terminating
19 request\) in order to perform the matching procedure with SPTs within initial filter criteria](#). This clause
20 describes the requirements for the S-CSCF when this request is a mobile originating request. So, [if this
21 request is a mobile originating request](#), the S-CSCF shall:

22

- 23 - check whether this request matches the initial filter criteria with the highest priority for that user by
24 checking the service profile against the public user identity, which was used to place this request;
- 25 - if this request matches the initial filter criteria, the S-CSCF shall forward this request to that
26 application server, then check for matching of the next following filter criteria of lower priority, and
27 apply the filter criteria on the SIP method received from the previously contacted application server;
- 28 - if this request does not match the highest priority initial filter criteria, check for matching of the
29 following filter criteria priorities until one applies;
- 30 - if no more (or none) of the initial filter criteria apply, the S-CSCF shall forward this request
31 downstream based on the route decision;
- 32 - in any instance, if the contact of the application server fails, the S-CSCF shall use the "default
33 handling" associated with the initial Filter Criteria to determine if it shall either terminate the call or
34 let the call continue based on the information in the filter criteria; if the filter criteria does not
35 contain instruction to the S-CSCF regarding the failure of the contact to the application server, the
36 S-CSCF shall let the call continue as the default behaviour.

1 **6.5 Handling of mobile terminating requests**

2 **6.5.1 Handling of mobile terminating requests, registered user**

3 The S-CSCF shall verify if the public user identity is barred. If so, it shall respond with an error code and
4 stop further session processing.

5 The S-CSCF only looks for initial filter criteria when receiving an initial request. A terminating initial
6 request may also originate from an Application Server via the ISC interface. Terminating Initial requests
7 from an Application Server via the ISC interface also cause the S-CSCF to look for initial filter criteria.

8
9 When such a request comes in, the S-CSCF shall first check whether this is an originating request or a
10 terminating request in order to perform the matching procedure with SPTs within initial filter criteria. This
11 clause describes the requirements for the S-CSCF when this request is a terminating request. So, if this
12 request is a terminating request, the S-CSCF shall:

13 - if unavailable, download the relevant subscriber profile including the initial filter criteria from the
14 HSS;

15 - use the initial Filter Criteria for the Mobile Terminating request;

16 - in case the Request-URI changes when visiting an AS, terminate the checking of filter criteria,
17 route the request based on the changed value of the Request-URI and not execute the subsequent
18 steps;

19 - the subsequent requirements for the S-CSCF are the same as those for handling originating requests.

20 It may be possible that originating UE and terminating UE shares the same S-CSCF and AS, therefore the
21 shared application server may interact with the S-CSCF twice in one transaction but in originating and
22 terminating procedures respectively.

23 **6.5.2 Handling of mobile terminating requests, unregistered user**

24 The S-CSCF shall verify if the public user identity is barred. If so, it shall respond with an error code and
25 stop further session processing.

26 The S-CSCF only looks for initial filter criteria when receiving an initial request. A terminating initial
27 request may also originate from an Application Server via the ISC interface. Terminating Initial requests
28 from an Application Server via the ISC interface also cause the S-CSCF to look for initial filter criteria.

29
30 When such a request comes in, the S-CSCF shall first check this is an originating request or a terminating
31 request. This clause describes the requirements for the S-CSCF when this request is a terminating request.
32 So, if this request is a terminating request, the S-CSCF shall:

33 - if unavailable, download the relevant subscriber profile including the initial filter criteria from the
34 HSS;

35 - use the initial Filter Criteria for the Mobile Terminating request to unregistered user;

36 - the subsequent requirements for the S-CSCF are the same as those for handling originating requests.


37
38 It may be possible that originating UE and terminating UE shares the same S-CSCF and AS, therefore the
39 shared application server may interact with the S-CSCF twice in one transaction but in originating and
40 terminating procedures respectively.

41 **6.6 Handling of IP multimedia session release requests**

42 In handling session release, the S-CSCF may either proxy the release request or initiates a release request.

1 **6.6.1 S-CSCF proxying release request**

2 When the S-CSCF receives a release request from some entities (etc, application server, user agent) for a
 3 dialog, it proxies the release request to the destination according to route information in that release
 4 request.

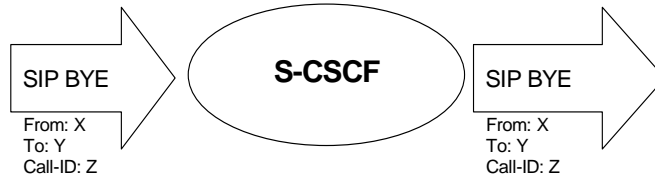


5

6

Figure 6.6.1.1: S-CSCF proxying release request

7 **6.6.2 S-CSCF initiating release request**

8 For some reason (e.g., administration decision of the network), the S-CSCF may be required to release an
 9 ongoing dialog. In this case, the S-CSCF shall send a release request to all the entities that are involved in
 10 this dialog. In a typical AS involved dialog, the S-CSCF should send the release request to the AS and the
 11 UE it is serving as shown in figure 6.6.2.1.

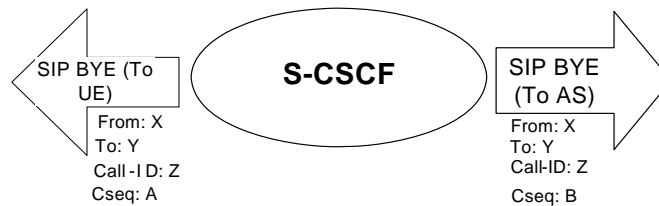

12

13

Figure 6.6.2.1: S-CSCF initiating release request

6.7 Handling of subscription and notification

The S-CSCF supports subscription to and notification of user registration events by the UE, P-CSCFs and Application Servers using the mechanisms specified in [13]. The subscribing entity may subscribe to the registration state of individual public user identities for the purpose of discovering the implicitly registered public user identities. When notifying a subscribing entity of a change in the registration state of a subscribed to public user identity the S-CSCF shall include in the notification all the implicitly registered public user identities associated with the registered public user identity in addition to the registered public user identity.

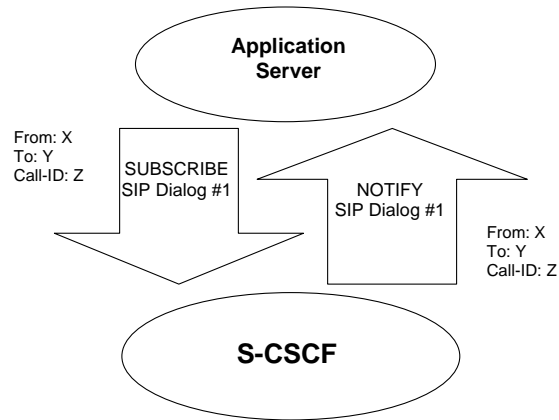


Figure 6.7.1: Application Server – S-CSCF subscribe notify dialog

6.8 S-CSCF handling IMS accounting

In registration processing, a S-CSCF may send a third party REGISTER to an application server, where the ICID, IOI and charging function addresses are included in the message.

During a session, the S-CSCF shall generate the accounting records for accounting purposes.

In a session originating case, when receiving an incoming initial request, this request will carry the ICID generated by the upstream P-CSCF, which is serving the originating user; the S-CSCF shall store the ICID for this session and handle this request based on filter criteria. After processing this request the S-CSCF shall include the ICID and the accounting function addresses received from the HSS in the outgoing message. The accounting function addresses identify on-line, and off-line charging entities in the home network. It is implementation dependent how IMS related entities such as P-CSCF in the visited network get the local AAA addresses in the case that the P-CSCF is located in the visited network. If this message is sent outside the mobile network, S-CSCF shall include Inter Operator Identifier (IOI) that identifies the home network into the message. IOI is globally unique identifier for using inter operator accounting purposes. The response to the outgoing message may contain a separate IOI that identifies the home network of the called party. The S-CSCF shall retain either IOI in the message when contacting the Application Servers. The S-CSCF will receive ICN accounting information from subsequent requests and responses, the S-CSCF shall store these parameters and shall remove them from the outgoing message if this message is sent to the terminating UE's home network or the originating UE's visited network. The ICN accounting information may be sent to application servers.

In a session terminating case, when receiving an incoming initial request, this request will carry the ICID generated by the originating UE's P-CSCF; the S-CSCF shall store the ICID for this session and handle this request based on filter criteria. After processing this request the S-CSCF shall include the ICID and the accounting function addresses received from the HSS in the outgoing message. The accounting function addresses identify on-line and off-line accounting entities in the home network. IOI may be received from another network or is inserted by the MGCF to identify the originating PSTN/PLMN. If IOI is received at the S-CSCF, the S-CSCF shall store the IOI value for the network that sent the request. The response to the incoming message may contain a separate IOI that identifies the home network of the S-CSCF. The S-CSCF shall retain either IOI in the message when contacting the Application Servers. Afterwards, the S-CSCF shall remove the IOI of the

1 requesting network from the message before sending the message further within the network. The S-CSCF will
2 receive ICN accounting information from subsequent requests and responses, the S-CSCF shall store these
3 parameters and removes them from the outgoing message if this message is sent to the terminating UE's
4 visited network or the originating UE's home network. The ICN accounting information may be sent to
5 application servers.

6 For detailed information on transporting accounting parameters between IMS entities using SIP, see [5].

7 **6.9 Description of subscriber data**

8 **6.9.1 Application Server subscription information**

9 The Application Server Subscription Information is the set of all Filter Criteria that are stored within the
10 HSS for service profile for a specific user. This information shall be sent by the HSS to the S-CSCF via the
11 Cx Interface during registration. More than one set of Filter Criteria may be sent during registration if
12 implicitly registered public user identities belong to different service profiles. Filter Criteria shall also be
13 sent after registration via the Cx interface when requested, as specified in [8].

14 **6.9.2 Filter Criteria**

15 This clause defines the contents of the Filter Criteria. This information is part of the Application Server
16 Subscription Information. For further information about the XML [modellingmodeling](#) see [8].

17 Filtering is done for initial SIP request messages only.

18 The S-CSCF shall apply filter criteria to determine the need to forward SIP requests to Application Servers.
19 These filter criteria will be downloaded from the HSS.

20 Initial Filter Criteria (iFC) are stored in the HSS as part of the user profile and are downloaded to the S-
21 CSCF upon user registration, or upon a terminating initial request for an unregistered user if unavailable.

22 They represent a provisioned subscription of a user to an application. After downloading the User Profile
23 from the HSS, the S-CSCF assesses the filter criteria. Initial Filter Criteria are valid throughout the
24 registration lifetime of a user or until the User Profile is changed.

25 Subsequent Filter Criteria (sFC) are not used in this version of this specification.

26 **6.9.2.1 Application Server address**

27 Address to be used to access the Application Server for a particular subscriber.

28 **6.9.2.2 Default handling**

29 The default handling procedure indicates whether to abandon matching of lower priority triggers and to
30 release the dialogue, or to continue the dialogue and trigger matching.

31 Use of the default handling procedure by the AS is not supported in this version of this specification.

32 **6.9.2.3 Trigger point**

33 Trigger Points are the information the S-CSCF receives from the HSS that defines the relevant SPTs for a
34 particular application. They define the subset of initial SIP requests received by the S-CSCF that should be
35 sent or proxied to a particular application server. When the S-CSCF receives an initial SIP request, it
36 evaluates the filter criteria one by one. If the initial SIP request matches the filter criteria, the S-CSCF
37 proxies the SIP request to the corresponding SIP AS/OSA SCS.

38 **6.9.2.4 iFC Priority**

39 If there are multiple initial Filter Criteria assigned for one subscriber, the priority shall describe the order in
40 which the S-CSCF shall assess them, and then contact the Application Servers when the SIP request
41 matches the initial filter criteria. In this case, the S-CSCF shall interact with the application server
42 associated with the initial matching filter criteria, starting from the filter criteria which has the highest
43 priority.

1 **6.9.2.5 Service Information**

2 Service Information is transparent information, and is not processed by the HSS or the S-CSCF. Service
3 Information is optionally part of an initial Filter Criteria. If it is available from the initial Filter Criteria the
4 S-CSCF shall include it into the body of the SIP request which is sent from the S-CSCF to the AS to which
5 the initial Filter Criteria is pointing to. Service Information is only included by the S-CSCF in REGISTER
6 requests where the S-CSCF acts as a UAC.
7

8 **6.9.3 Authentication data**

9 This clause defines the Authentication Data. This data shall be sent by the HSS to the S-CSCF via the Cx
10 Interface during registration.

11 For the handling of authentication data, see [11].

12 **7 Functional requirements of HSS**

13 **7.1 Subscriber data related storage requirements for HSS**

14 HSS stores information required by:

- 15 - S-CSCFs (downloaded via Cx interface). Data model and abstract syntax notation are described in
16 [8];
- 17 - Application Servers (downloaded via Sh interface). Signalling flow and message contents are
18 described in [18].

19 The service related data shall be transparent to HSS, this requires the HSS has some means to differentiate
20 the source of the request for the data, therefore, the HSS can respond with the data the request asks for.

21 **7.2 Interfaces defined for HSS**

22 **7.2.1 HSS – CSCF (Cx) interface**

23 This interface is used to send subscriber data to the S-CSCF, including Filter Criteria (and their priority);
24 which indicates which SIP requests should be proxied to which Application Servers.

25 The protocol used between the HSS and CSCF (Cx Interface) is specified in [8] and [17].

26 **7.2.2 HSS - Application Server (Sh) interface**

27 The Sh interface is between the HSS and the SIP Application Servers and the OSA SCS and may be used
28 for transferring User Profile information such as user service related information or user location
29 information, or charging function addresses. Requirements for the Sh interface are specified in [3].

30 The protocol used between the HSS and AS (Sh Interface) is specified in [18] and [19].

31 **7.2.3 Void**

32 **7.2.4 Void**

33 **7.3 Procedures during IP multimedia registration**

34 These procedures are described in [8].

35 **7.4 Procedures during IP multimedia sessions**

36 These procedures are described in [8].

1 8 Functional requirements of the MRFC


2 8.1 Functionality of the MRFC

3 8.1.1 Overview of MRFC Functionality

4 The functionality of the MRFC is defined in [3]. These clauses describe how an Application Server may
 5 interact with a MRFC. In some cases a UE may interact directly with the MRFC; however these cases are
 6 outside the scope of this specification and only the cases of Application Server control for service provision
 7 are considered here. In all cases of Application Server control, all session control requests that are passed
 8 between the Application Server and the MRFC are sent via the S-CSCF using the ISC interface and the
 9 interface of the Mr reference point.

10 MRFC addresses are made known via peer-to-peer arrangements within the IM CN subsystem.

11 Figure 8.1.1.1 describes the relationship of the Application Server with the S-CSCF and MRFC.

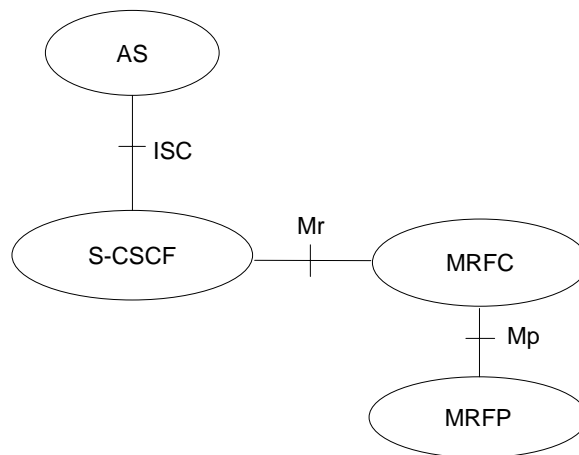

12

13 **Figure 8.1.1.1: Relationship of MRFC and MRFP with S-CSCF, and Application Servers**

14 8.1.2 Tones and announcements

15 An Application Server is in control of the tone/announcement selection and is aware of MRFC capabilities.
 16 The MRFC accepts INVITE requests sent from an Application Server, via the S-CSCF, for the purpose of
 17 applying tones and announcements. The INVITE sent to the MRFC will contain sufficient information to
 18 play the appropriate tone or announcement.

19 The MRFC shall support both the offer/answer as defined in IETF RFC 3264 [15] and the offer/answer
 20 with preconditions models for SDP negotiation with the AS. However, the offer/answer model for SDP
 21 negotiation between the AS/S-CSCF and the MRFC is sufficient for applying tones and announcements.
 22 The MRFC should always grant the requests from the AS (unless there is a resource problem). The receipt
 23 of the ACK at the MRFC triggers the playing of the tone or announcement.

24 The tone or announcement should end when a BYE is received. Alternatively, an expiration time may have
 25 been specified from the AS within the SDP of the INVITE request. In this case, the MRFC may terminate
 26 the media on its own and generate and BYE request towards the AS. A tone or announcement may also
 27 have a pre-determined play time (e.g., confirmation tone), and so there may not be a need for the AS to
 28 send a request to stop it or to include the play time in the request.

29 See annex B for a call flow example of playing an announcement for a mobile originated call.

1 **8.1.3 Ad hoc conferences (multiparty calls)**

2 An Application Server can control an Ad Hoc conference (multiparty call) and is aware of MRFC
3 capabilities.
4 The MRFC accepts INVITE requests sent from an Application Server, via the S-CSCF, for the purpose of
5 managing ad hoc conferences. The INVITE sent to the MRFC shall contain sufficient information to
6 initiate, add and remove parties from the conference. Re-INVITE requests can also be sent for managing
7 floor control and for parties to leave and rejoin the media path.
8 The MRFC shall support both the offer/answer as defined in IETF RFC 3264 [15] and the offer/answer
9 with preconditions models for SDP negotiation with the AS. However, the offer/answer model for SDP
10 negotiation between the AS/S-CSCF and the MRFC is sufficient for managing ad hoc conferences. The
11 MRFC should always grant the requests from the AS (unless there is a resource problem). The MRFC will
12 reserve the requested local resources and return the appropriate resource identifiers in the 200 response.
13 See annex B for a call flow example of an Ad Hoc Conference (Multiparty Call).

14 **8.1.4 Transcoding**

15 An Application Server can control a transcoding session and is aware of MRFC capabilities.
16 The MRFC accepts INVITE requests sent from an Application Server, via the S-CSCF, for the purpose of
17 transcoding. The INVITE sent to the MRFC shall contain sufficient information to associate the two
18 sessions that require transcoding.
19 The MRFC shall support both the offer/answer as defined in IETF RFC 3264 [15] and the offer/answer
20 with preconditions models for SDP negotiation with the AS. Either may be necessary for SDP negotiation
21 between the AS/S-CSCF and the MRFC. The MRFC should always grant the requests from the AS (unless
22 there is a resource problem).
23 For the offer/answer model, the MRFC responds to the INVITE request with a 200 response indicating the
24 selected media in the SDP. The MRFC will also reserve the requested local resources at that time and
25 return the appropriate resource identifiers in the 200 response.
26 For the offer/answer with preconditions model, the MRFC responds to the INVITE request with a 183
27 response indicating the list of codecs supported by the MRFC. When the PRACK is received indicating the
28 selected media in the SDP, the MRFC will reserve the requested local resources at that time and return the
29 appropriate resource identifiers in the 200 response.
30 See annex B for call flow examples of providing transcoding.

31 **8.2 Interfaces defined for MRFC**

32 **8.2.1 MRFC – S-CSCF (Mr) interface**

33 The protocol used between MRFC and S-CSCF is based on Session Initiation Protocol, which is specified
34 in [5].

9 Generic IP multimedia session handling for SIP Application Servers

9.1 Architecture

This clause describes the functional architecture needed to support interactions between the S-CSCF in the IP Multimedia Subsystem and the Application Server(s). This clause relates to the generic behaviour of SIP Application Servers, which since SIP is the ISC interface protocol shall be considered to apply to all application servers, (which also includes the SIP behaviour of the OSA SCS). The detailed models for service provision are described in the clauses below. These models shall apply to the SIP behaviour of the OSA SCS and all the Application Servers.

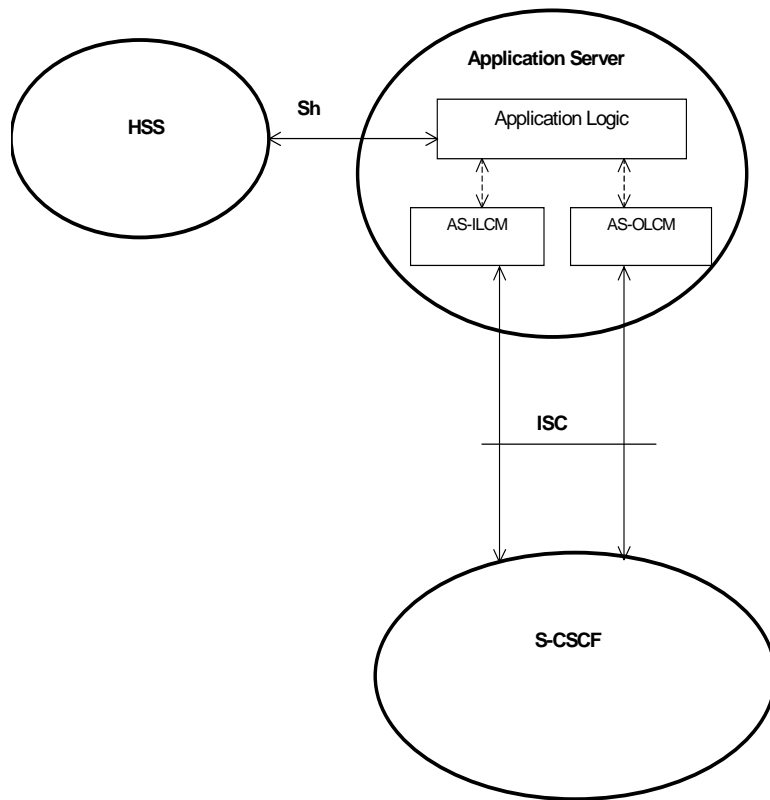


Figure 9.1.1: Application Server functional model

Figure 9.1.1 identifies the components of a functional model of the AS.

NOTE: These components are defined only as a model of the expected behaviour of the AS on the ISC interface and are not intended to define or constrain the actual implementation.

The components include the AS-ILCM, the AS-OLCM and the Application Logic. The AS-ILCM shall store transaction state, and may optionally store session state depending on the specific service being executed. The AS-ILCM interfaces to the S-CSCF (ILCM) for an incoming leg.

The AS-OLCM shall store transaction state, and may optionally store session state depending on the specific service being executed. The AS-OLCM interfaces to the S-CSCF (OLCM) for an outgoing leg.


The Application Logic provides the service(s) and interacts between the AS-ILCM and AS-OLCM.

1 The Application Server can access the HSS via the Sh interface to access subscriber related data specific to
2 the service or application including the address of the S-CSCF.

3 **9.1.1 Modes of operation between Application Server and S-CSCF**

4 An Application Server can utilize five basic modes of operation for processing SIP Requests. Services can
5 be built using combinations of these five modes of operation between the Application Server and the S-
6 CSCF. An application Server can transition from one mode of operation to another during the lifetime of a
7 multimedia session it is managing.

8 **9.1.1.1 Application Server acting as terminating UA, or redirect server**

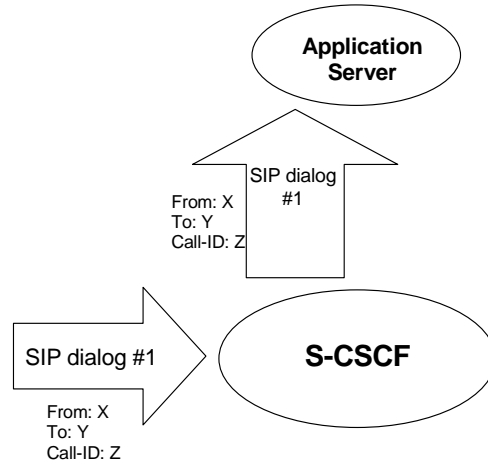


9

10 **Figure 9.1.1.1.1: Application Server acting as terminating UA, or redirect server**

11 In this mode of operation the incoming SIP Request is proxied by the S-CSCF to the Application Server,
12 which then acts as either a UA or Redirect Server as specified in IETF RFC 3261 [6].

13 **9.1.1.2 Application Server acting as originating UA**

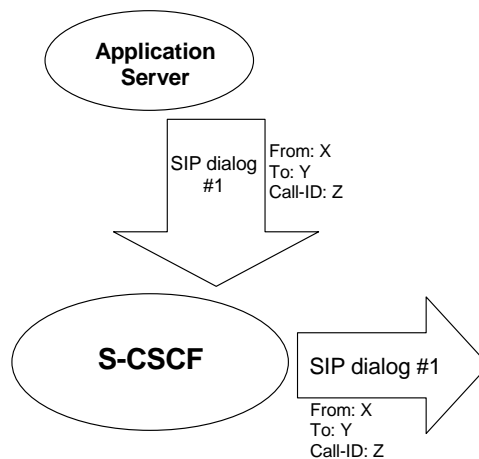


14

15 **Figure 9.1.1.2.1: Application Server acting as originating UA**

16 In this mode of operation the Application Server acts as a UA as specified in IETF RFC 3261 [6] and
17 generates a SIP Request which it sends to the S-CSCF which then proxies it towards the destination.

1 **9.1.1.3 Application Server acting as a SIP proxy**

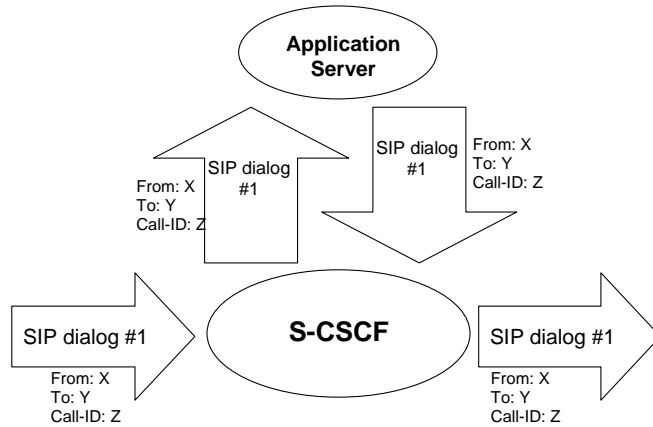

2


3

Figure 9.1.1.3.1: Application Server acting as a SIP proxy

4 In this mode of operation the incoming SIP Request is proxied by the S-CSCF to the Application Server
 5 which then acts as a proxy as specified in IETF RFC 3261 [6] proxying the request back to the S-CSCF
 6 which then proxies it towards the destination. During the proxy operation the Application Server can add,
 7 remove or modify the header contents contained in the SIP request according to the Proxy rules specified in
 8 IETF RFC 3261 [6].

9 **9.1.1.4 Application Server performing third party call control/ B2BUA mode**

10

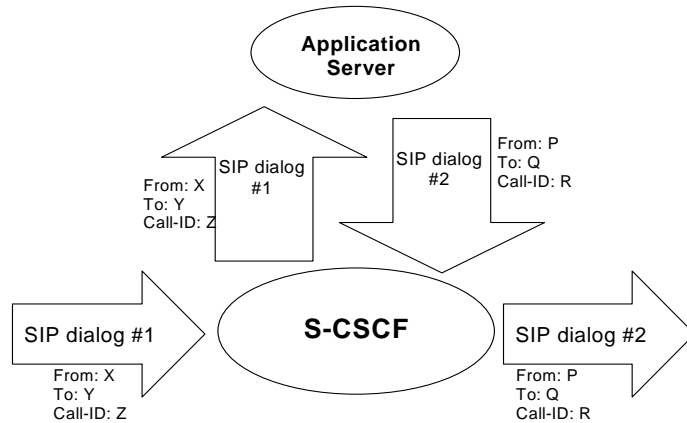


11

12

Figure 9.1.1.4.1: Application Server performing third party call control

13 In this mode of operation the incoming SIP Request is proxied by the S-CSCF to the Application Server
 14 which then generates a new SIP request for a different SIP dialog which it sends to the S-CSCF which then
 15 proxies it towards the destination. In this mode the Application Server behaves as a B2BUA for the
 16 multiple SIP dialogs as specified in IETF RFC 3261 [6].

1 9.1.1.5 Application Server not involved or no longer involved

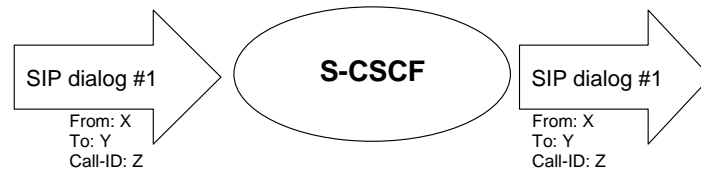

2

3 **Figure 9.1.1.5.1: A SIP leg is passed through the S-CSCF without Application Server**
4 **involvement**

5 In this mode of operation the Application Server was either never involved in the SIP session signalling or
6 has determined to be no longer involved. The incoming SIP Request is proxied by the S-CSCF towards the
7 destination. The Application Server can maintain itself in the SIP session signalling path by inserting itself
8 in a Record-Route Header as specified in IETF RFC 3261 [6]. If the Application Server does not insert
9 itself in a Record Route header then this mode of operation shall be used for all subsequent requests related
10 to this SIP dialog.

11 9.2 Interfaces defined for a SIP Application Server

12 9.2.1 S-CSCF – Application Server (ISC) interface

13 This interface can be used by the Application Server to control an IP Multimedia session via a S-CSCF.
14 Transactions between the S-CSCF and the Application Server on this interface are initiated either as a
15 result of the S-CSCF proxying a SIP request to the Application Server or by the Application Server
16 initiating by generating and sending a SIP request to the S-CSCF. This interface is based on SIP.

17 9.2.2 Application Server – HSS (Sh) interface

18 The Sh interface is between the HSS and the SIP Application Servers and the OSA SCS and may be used
19 for transferring User Profile information.

20 9.3 Description of Application Server related subscriber data

21 9.3.1 Application server subscription information

22 This clause defines the general contents of the Subscription Information that may be required by the
23 Application Server. The AS shall obtain this information from the HSS via the Sh interface or by other
24 operator defined methods. The subscription information may be retrieved during registration or at any other
25 time dependent on AS and service requirements.

26 9.3.1.1 Void

27 9.3.1.2 Service platform trigger points (STP)

28 Service Platform Trigger Points (STP) are the points in the SIP signalling that instruct the Application
29 Server to trigger the service logic.

30 9.3.1.3 Service scripts

31 | The Application Server can utilize a call processing script (e.g. in CGI, CPL, Java™TM Servlets, or another
32 proprietary language), which may be obtained from the HSS via the Sh interface or by other operator
33 defined methods.

1 NOTE: Java™ is the trade name of a product supplied by Sun Microsystems. This information is
 2 given for the convenience of users of the present document and does not constitute an
 3 endorsement by 3GPP2 of the product named. Equivalent products may be used if they can
 4 be shown to lead to the same results.

5 **9.4 Procedures for multimedia session handling with a SIP based** 6 **Application Server**

7 **9.4.1 Application Server handling of mobile originating requests**

8 The functional mode of application server is shown in figure 9.1.1.
 9 For an originating request, the AS-ILCM may interact with the application logic reporting call state
 10 information. Depending on the service that is being provided, the application logic may instruct the AS-
 11 OLCM to modify the request if needed (e.g. by inserting itself in the Record-Route etc). After processing
 12 the request the AS-OLCM may send this request back to the S-CSCF.
 13 When the AS acts as a B2BUA, the application server shall maintain and correlate the multiple dialogues
 14 that it creates. It shall be responsible for correlating the dialogue identifiers and shall decide when to
 15 translate a message from one dialog to the other, or when to perform other functions based on the
 16 instruction from the application logic.

17 **9.4.2 Application Server handling of mobile terminating requests**

18 The handling of mobile terminating requests is similar with the handling of mobile originating requests as
 19 defined in clause 9.4.1.

20 **9.4.3 Application Server handling of SIP registration**

21 When the user is registered with the network and has been assigned a S-CSCF, the application servers,
 22 which are interested to know about the user registration events, should get a third party registration request
 23 generated by the S-CSCF. When the application server receives the request, the AS may perform a service
 24 triggered by a REGISTER. If the application server doesn't support this mechanism, it shall send back an
 25 error response to the S-CSCF. If the application server supports this mechanism, it shall treat this request as
 26 a notification from the network about the user's registration event and extract the important information
 27 from this request.

28 The application server will also expect to receive REGISTER requests indicating re-registration or
 29 deregistration events from the S-CSCF, so that the application server can update or release user's
 30 registration information.

31 The important information carried in the third party registration request are, the public user identity, the S-
 32 CSCF address, and the expiration time.

34 Application Servers can also subscribe to the S-CSCF Registration Event Package after receiving the third
 35 party registration request. After subscribing to the event package with the S-CSCF, the application will
 36 expect to receive the notifications from the S-CSCF, which may carry the user's implicitly registered public
 37 user identities and user's registration event information.

38 The application server can also obtain the user's implicitly registered public identities by accessing the HSS
 39 via Sh interface.

40 An application server will require knowledge of a user's IMS subscription information if they are to
 41 correctly apply services. This information can be provided to the application server in two ways, either:


- 42 a) Manually by provisioning. This is outside of the scope of this specification.
- 43 b) Automatically from the HSS via the Sh interface.

44 More information on these procedures is contained in [5].

1 **9.4.4 Application Server handling of IP multimedia session release requests**

2 **9.4.4.1 Session release request terminated at the Application Server**

3 When the application server receives a session release request, if the application server is acting as a user
 4 agent or a B2BUA, it shall send 200 OK to the entity that initiated the session release request.

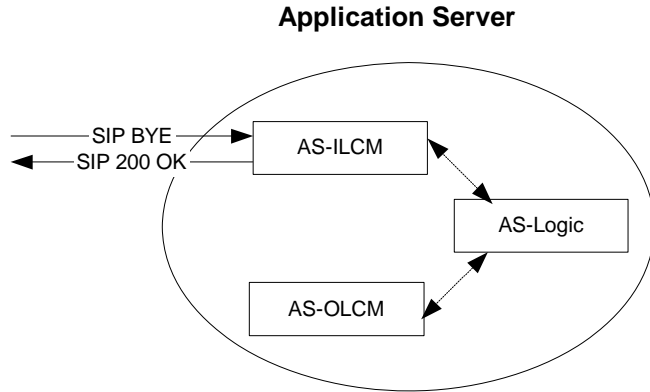


5

6 **Figure 9.4.4.1.1: Release request terminated at the Application Server**

7 **9.4.4.2 Session release request proxied by the Application Server**

8 When receiving a session release request, the application server may proxy the release request based on the
 9 route information in that request. This handling is typically used when the application server is in proxy
 10 mode.

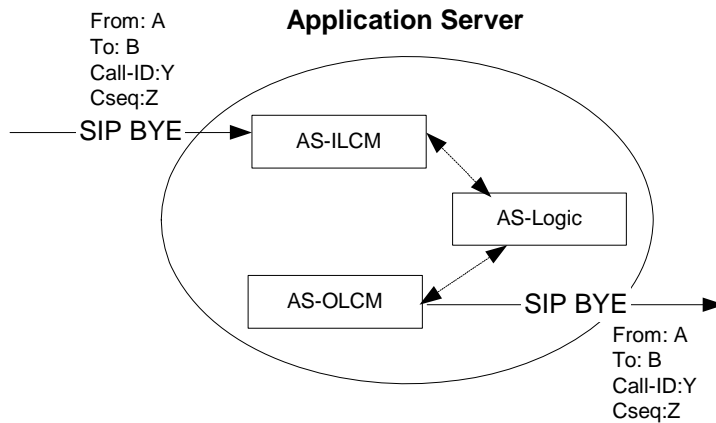


11

12 **Figure 9.4.4.2.1: Release request proxied by the Application Server**

1 9.4.4.3 Session release request initiated by the Application Server

2 If needed, the application server may initiate release requests to the entities involved in the dialogs the
 3 application server manages. Application servers may initiate release requests in either user agent or
 4 B2BUA mode.

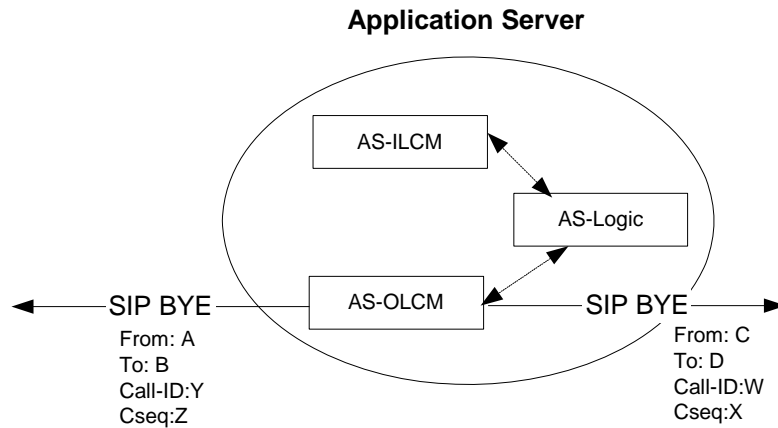

5

6 **Figure 9.4.4.3.1: Release request initiated by the Application Server**

7 9.4.5 Application server handling of IP multimedia accounting

8 If an application server receives a third party REGISTER from the S-CSCF carrying the ICID, IOI and
 9 accounting function addresses, the application server may store these parameters for accounting purposes.
 10 In an originating case, when processing an incoming initial request carrying the ICID, IOI, ICN accounting
 11 information and accounting function addresses for this session, the application server shall pass these
 12 parameters in the outgoing message and may store the parameters for accounting purposes.

13 In a terminating case, when processing an incoming initial request carrying the ICID, IOI, ICN accounting
 14 information and accounting function addresses for this session, the application server shall pass these
 15 parameters in the outgoing message and may store the parameters for accounting purposes.

16 When the application server is acting as an originating user agent as described in clause 9.1.1.2 and initiates
 17 a session or a standalone transaction, it shall generate ICID itself. The application server may retrieve the
 18 charging addresses on Sh interface.

19 When the conflict occurs between the charging function address(es) received over the ISC interface and
 20 those received over the Sh interface, the address(es) received over the ISC interface should take
 21 precedence.

22 **NOTE:** The use of the Sh interface to retrieve charging function addresses is not intended as a
 23 general-purpose alternative to receiving charging function addresses from the ISC interfaces.
 24 Rather, it is meant to address a special case where the AS needs to interact with the charging
 25 system before initiating a request to a user when the AS has not received the third party
 26 REGISTER for that user.

27 For detailed information on transporting accounting parameters between IMS entities using SIP, see [5].

28 10 Void

29

30 11 IP multimedia session handling with an OSA-Service 31 Capability Server

32 This clause describes the functional architecture needed to support interactions with the S-CSCF in the IP
 33 Multimedia Subsystem and the OSA-SCS. The OSA-Service Capability Server is a SIP Application Server

1 which interfaces SIP to the OSA framework. The generic SIP Application Server behaviour of the OSA-
2 SCS is specified in clause 9 of the present document.
3 The detailed OSA-SCS procedures for IMS Application Server are specified in [7].

4 **12. IP multimedia session handling with an Charging Server**

5 This clause describes the functional architecture needed to support interactions with the S-CSCF in the IP
6 Multimedia Subsystem and Charging Server. The Charging Server is a specific SIP Application Server that
7 performs the role of online charging mechanism for the Event Charging Function (ECF) and Session
8 Charging Function (SCF).

9 The detailed procedures for Charging Server are specified in [20] and [21].

1 **Annex A (informative):** 2 **Scalability and deployment considerations for IP** 3 **multimedia service provision**

4 This Annex is intended to guide the reader in deployment and real life issues.
 5 This specification has provided a set of tools for the application developer and the application integrator to
 6 utilize in order to develop and deploy applications and provide services for the IP multimedia core network
 7 subsystem. However, practical deployments will need to consider certain scalability issues with the use or
 8 misuse of some of the tools specified in this specification.


9 The architecture allows for any number of Application Servers to be connected to any number of S-CSCFs
 10 and any number of Application Servers to be involved in the initiation of a multimedia session. A
 11 scalability issue may arise if there are a large number of S-CSCF and AS in a network.

12 Consideration should be given to the signalling propagation delays introduced when many Application
 13 Servers add themselves to the route to provide originating and terminating services for the calling and
 14 called parties.

15 A SIP Application Server may act as gateway function by forwarding an incoming request to external ASs
 16 beyond the IM CN subsystem. An external ASs will also send responses to IM CN subsystem via a SIP AS
 17 gateway. These other Application Servers can be located externally to the home network, and use the SIP
 18 Application Server as a gateway to the ISC interface. The interface between the SIP Application Server
 19 acting as a gateway, and other Application Servers is outside the scope of the present document.

20 There is another case where the external AS is connected with S-CSCF (or I-CSCF) via public ISP
 21 networks depending on the operators desire for network configuration hiding. S-CSCF or entities outside
 22 the S-CSCF may perform the interworking function.

23 Care must also be taken to the priority and order of contact of multiple Application Servers during a session
 24 in order to account for feature interaction issues.

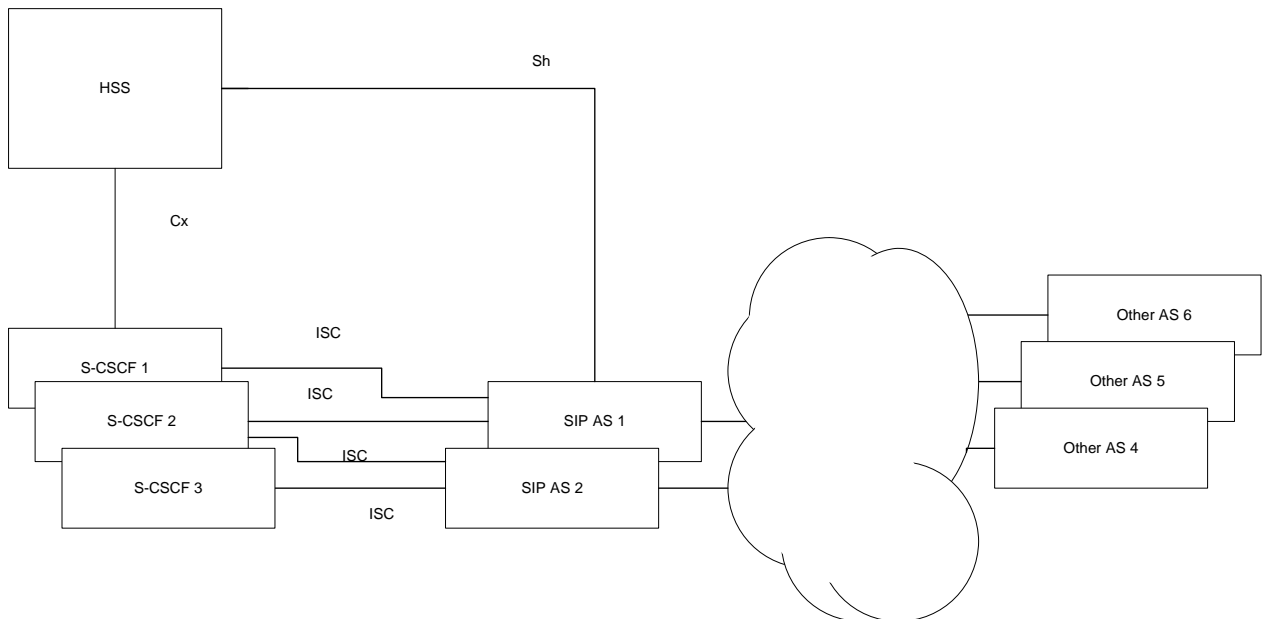


25
26

27 **Figure A.1: Example hierarchical architecture for Application Servers**

28 Figure A.1 depicts a possible solution that shows how a S-CSCF (S-CSCF1 S-CSCF3) could be connected
 29 to a single AS (SIP AS1), while another (S-CSCF2) could be connected to more than one, in this case it is
 30 two (SIP AS1, SIP AS2). All S-CSCF will be connected to the HSS via Cx. A SIP AS may be connected to

1 the HSS via Sh. SIP ASs may be connected to the IP network, which could allow them to contact
 2 Application Servers (e.g., either SIP ASs, or Other ASs).
 3 Care should be taken to the transaction delays resulting of a high number of S-CSCF and ASs on the
 4 session signalling path.
 5 A possible application of this architecture is described below (see figure A.2).
 6 While some applications need to discover the registration of a user on an event driven basis, many
 7 applications do not. For many applications an access to the HSS or other database to obtain the address of
 8 the S-CSCF that serves a user is sufficient to contact and initiate a session to that user, and others (such as
 9 basic call feature servers) do not require to be informed of the registration state or necessarily even need to
 10 know the identity of the user. It is therefore possible that the filter criteria are set in such a way that S-
 11 CSCF3 does not forward or notify SIP AS 3 of REGISTER requests. SIP AS3 would then need to
 12 determine registration status via other means (i.e. via IP network) not specified.
 13 The number of Application Servers receiving REGISTER requests (i.e., SIP AS3) from an individual S-
 14 CSCF should be minimized.

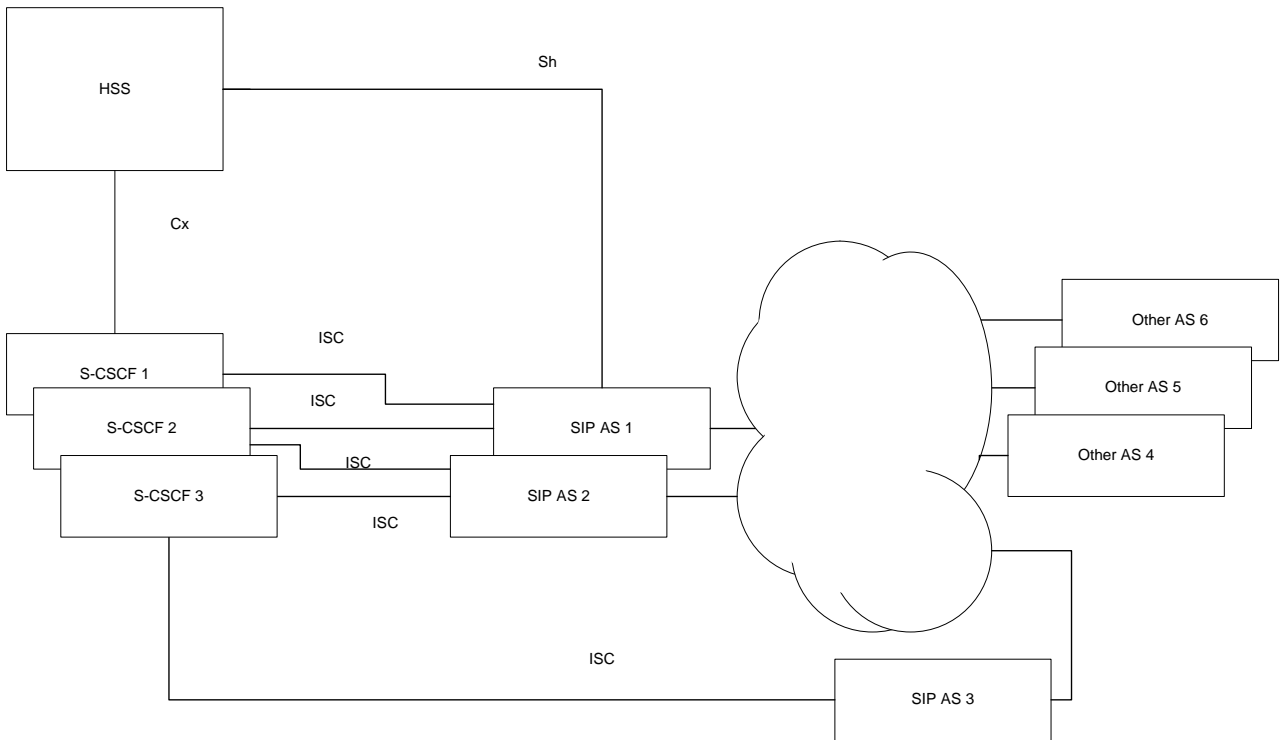

15
 16

17 **Figure A.2: Use of a hierarchy in a practical architecture for Application Servers**

1 **Annex B (informative):** 2 **Information flows for example services**

3 This annex contains some informative example information flows that show the possible flow of
4 information for some example services. These examples are intended only to help aid the understanding of
5 the behaviour of the S-CSCF, MRFC and Application Servers for service provision for the IM CN
6 subsystem and are not intended to recommend or specify how to create such services, (indeed the examples
7 given may not even be a good idea for a practical implementation).

8 The following modes of operation are shown in these examples:

- | | | |
|----|---|----------------------------------|
| 9 | - Third Party Registration to Application Server | Clause B.3.2; |
| 10 | - Application Server in Originating UA mode | Clause B.3.2; |
| 11 | - Application Server in Redirect mode | Clause B.1.3; |
| 12 | - Application Server in Terminating UA mode | Clause B.3.1; |
| 13 | - Application Server in Proxy mode | Clause B.1.4; |
| 14 | - Application Server in Third Party Call Control/B2BUA mode | Clauses B.2.1, B.2.2, and B.2.3; |
| 15 | - Application Server with no involvement | Clause B.1.4. |


17 **B.1 Call forwarding example**

18 **B.1.1 Call forwarding through Application Servers**

19 Figure B.1.1.1 presents the network configuration for a call-forwarding scenario. Some interfaces between
20 nodes have been omitted purely for clarity. In this configuration, the UE1 originates a call to the UE2. The
21 UE2 is subscribed to a Call Forwarding (CF) service based on the Calling Line Identification (CLI). The
22 CF service logic resides in an Application Server interfacing to the IM CN subsystem via the ISC interface.
23 The Application Server is programmed to detect all incoming calls or terminating sessions with UE1's CLI
24 and to instruct the S-CSCF to forward the calls/sessions to another destination, UE3, either directly or via
25 the UE1. These two session forwarding scenarios are shown by the red and blue coloured flows. When the
26 session redirection is carried out directly by the S-CSCF of the UE2, the network may notify the UE1 of its
27 call/session redirection.

28 As shown in figure B.1.1.1, the Application Server may be a SIP AS, or an OSA AS. The latter Application
29 Server interfaces the S-CSCF via the OSA SCS gateway.

1

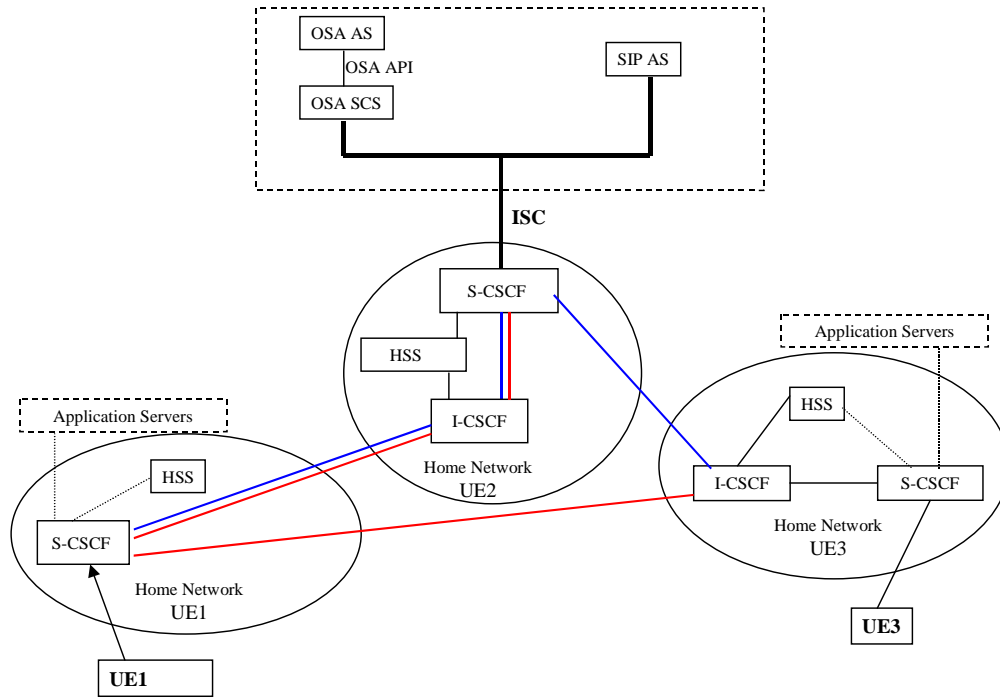

2

3

Figure B.1.1.1: Network configuration for the call forwarding examples

4

In this configuration, the originating UE1 and the terminating UE3 are assumed to be in their respective home network. The UE2, not shown in figure B.1.1.1, may be either at its home network or roaming in a visited network.

6

The CF feature is invoked based on the detection of the originating party's CLI "pre-activated" for call forwarding. Upon invocation of the CFonCLI feature, the call will be forwarded to a pre-specified destination. These two steps and a few underlying assumptions are briefly described below:

9

10 **B.1.1.1 Service activation and programming**

11 The UE2 activates its CFonCLI service and programs it with a Forward-to Number which is UE3's number, conditioning it to the originating party's line identity, CLI.

12

13 **B.1.1.2 Service invocation and control**

14 The UE1 makes a call to the UE2. The CFonCLI is invoked and the call is forwarded to the UE3 following a "Session Redirection" that is initiated by either the S-CSCF or the UE1.

15

16 NOTE: [3] lists six redirection procedures as follows:

17

NOTE 1: Session Redirection initiated by S-CSCF to IMS;

18

NOTE 2: Session Redirection initiated by S-CSCF to CS-domain;

19

NOTE 3: Session Redirection initiated by S-CSCF to general endpoint;

20

NOTE 4: Session Redirection initiated by P-CSCF;

21

NOTE 5: Session Redirection initiated by UE;

1 NOTE 6: Session Redirection initiated after Bearer Establishment.


2 **B.1.2 Assumptions**

3 For the CFonCLI service invocation and service control procedure, the following are assumed to hold:

- 4 - Normal case scenario, showing successful cases only;
- 5 - Subscriber data of all three UE1, UE2 and UE3 are stored in their respective HSS;
- 6 - All call/session control for the UE1, UE2, and UE3 is done in their respective home network S-CSCF;
- 7 -
- 8 - The UE2 has already subscribed to the CFonCLI service with a service provider operating an
- 9 Application Server where the service control logic resides;
- 10 - The pre-selected numbers (e.g., UE3) to which the originated calls are forwarded, are stored by the
- 11 CFonCLI service control logic upon activation of the feature by the UE2.

12 **B.1.3 UE redirect based call flows**

13

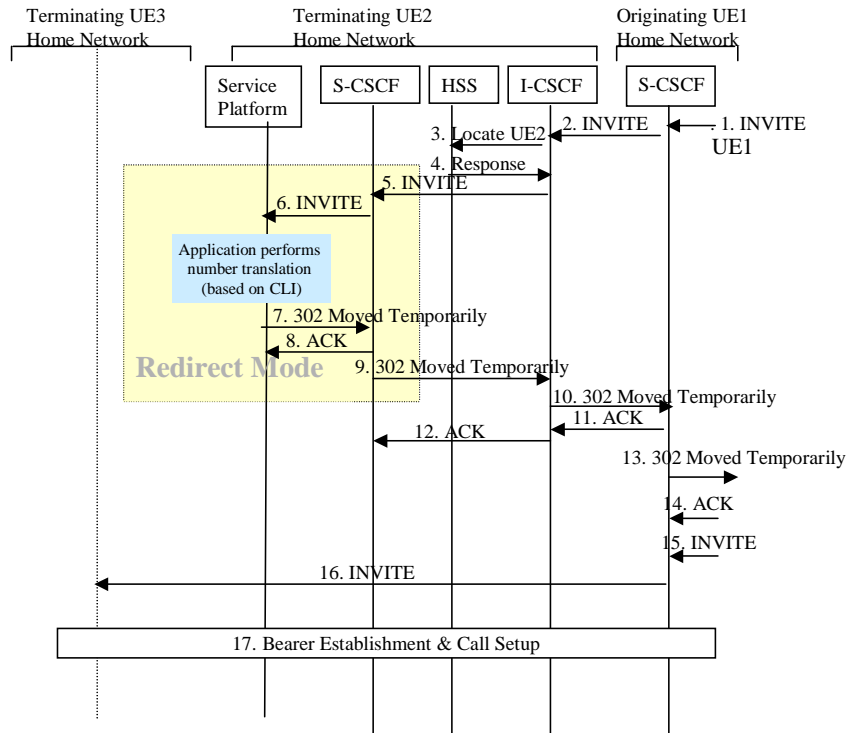

14

15

16 **Figure B.1.3.1: CFonCLI information flows with UE re-direct**


17 Figure B.1.3.1 presents the information flow diagram for the invocation and control of the CFonCLI
 18 service based on the configuration of figure B.1.1.1.

1 The UE1 initiates a call to UE2. The CFonCLI service logic is invoked in the Application Server when the
2 S-CSCF for UE2 detects that service invocation is required. The call is forwarded to the UE3 by the UE1
3 according to the "Session Redirection initiated by UE" procedure. The UE3 accepts the (forwarded) call. A
4 detailed description for each flow is given below:

- 5 1) The S-CSCF of UE1 receives a SIP invite request form UE1.
- 6 2) The I-CSCF of the UE2 receives a SIP INVITE request form the S-CSCF of the originating user,
7 UE1. UE1's CLI is included in this INVITE request.
- 8 3) The I-CSCF of the UE2 queries the HSS to obtain the S-CSCF of the UE2.
- 9 4) The HSS returns the S-CSCF location.
- 10 5) The I-CSCF forwards the INVITE to the S-CSCF of UE2.
- 11 6) Based on the information obtained from the UE2 Service Profile (during registration), the S-
12 CSCF of the UE2 detects that the criteria for certain pre-defined triggers are met. The INVITE
13 request is forwarded to the Application Server. The service logic is invoked in the Application
14 Server.
- 15 7) Based on the outcome of the execution of the service logic, the Application Server instructs the S-
16 CSCF to REDIRECT the session to UE3. The behaviour of the Application Server follows the
17 description of a 'redirect server'. It sends the 302 Move Temporary response with UE3 as the
18 redirect address to UE1. The Application Server plays no further part in the session establishment.
- 19 8) S-CSCF of UE2 sends ACK back to the Application Server to acknowledge the receiving of the
20 302 response.
- 21 9) S-CSCF of UE2 forwards the 302 Move Temporary to the I-CSCF of UE2.
- 22 10) The I-CSCF of UE2 forwards the 302 Move Temporary to the S-CSCF of UE1.
- 23 11) The S-CSCF of UE1 sends ACK to acknowledge the receiving of the 302 Move Temporary.
- 24 12) The I-CSCF of UE2 forwards the ACK to the S-CSCF of UE2.
- 25 13) The S-CSCF of UE1 forwards the 302 Move Temporary response to the next downstream hop.
- 26 14) The S-CSCF of UE1 receives the ACK for that 302 response from the downstream hop.
- 27 15) The UE1 re-issues an INVITE with UE3 as the destination.
- 28 16) The originating S-CSCF redirects the SIP INVITE request to the UE3's home network.
- 29 17) Bearer establishment & call setup between from the UE1 to the UE3 is performed following the
30 procedure described in the basic call flow sections for originating, inter-network and terminating
31 segments.

32 **B.1.4 S-CSCF based redirect call flows**

33 Figure B.1.4.1 presents the information flow diagram for the invocation and control of the CFonCLI
34 service based on the configuration of figure B.1.1.1, where redirection is made by the S-CSCF after
35 instructions from the service logic in the Application Servers.

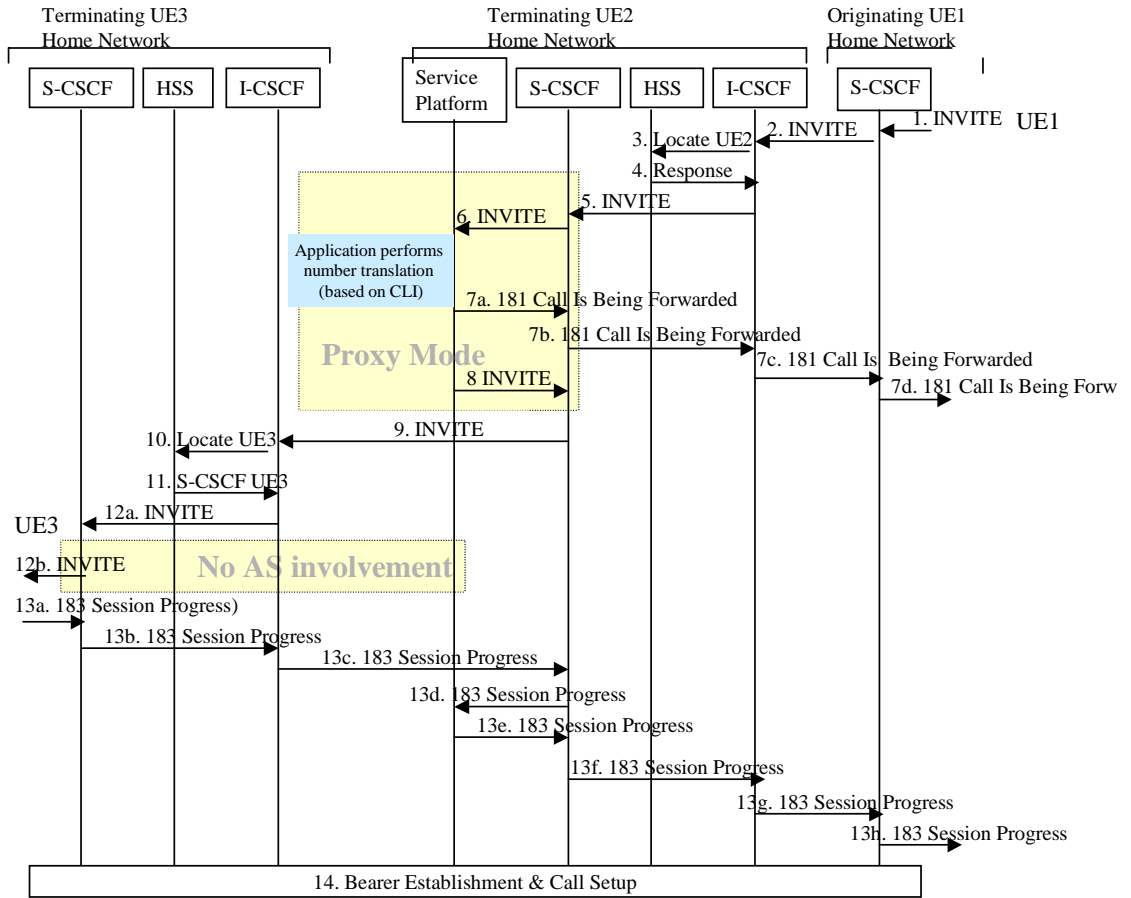

1
2

3

Figure B.1. 4.1: CFonCLI information flow with S-CSCF redirect

4 The UE1 (located in the originating visited network) makes a call to UE2. The CFonCLI is invoked and the
5 CFonCLI service logic is executed by an application residing in the Application Server.

6 The call is forwarded to the UE3 by the S-CSCF of UE2 according to the "Session Redirection" instructed
7 by the Application Server. The S-CSCF sends a SIP 181Call Is Being Forwarded to UE1 and a SIP Invite
8 request to UE3. The UE3 accepts the (forwarded) call. A detailed description for each flow is given below:

9 1) - 6) are identical to flows by the same number in the UE Redirect example provided in B.1.3.1

10 (7a, 7b, 7c and 7d) The Application Server notifies the UE1 that the call is being forwarded, by
11 sending a 181 Call Is Being Forwarded response.

12 8) The service logic forwards the INVITE request back to S-CSCF modifies the destination address
13 by inserting the identity of the UE3. The Application Server is in SIP proxy mode.

14 9) The S-CSCF of UE2 forwards the modified INVITE request it received from the Application
15 Server to the I-CSCF of UE3.

16 10) The I-CSCF of the UE3 queries the HSS to obtain the S-CSCF of the UE3.

17 11) The HSS returns UE3's S-CSCF location.

18 (12a and 12b) The I-CSCF forwards the SIP INVITE request the UE3 via its S-CSCF.

1 (13a, 13b, 13c, 13d, 13e, 13f, 13g, 13h and 13g) The UE3 accepts the incoming call and sends an
2 183 Session Progress back to UE1.

3 14) Bearer establishment & call setup between from the UE1 to the UE3 is performed following the
4 procedure described in the basic call flow clauses for originating, inter-network and terminating
5 segments.

6 **B.2 Announcement, conferencing and transcoding examples** 7 **using MRFC**

8 **B.2.1 Example information flow for a mobile originated IP multimedia session that** 9 **results in playing an announcement**

10 The following diagram shows an example of playing an announcement for a mobile originated IP
11 multimedia session. An AS (acting as B2BUA) performs third party call control with the MRFC, where the
12 S-CSCF is in the signalling path.

13 The "[x]" notation in the diagram is an indicator of a unique SIP dialog. The "dot" notation on the AS line
14 indicates B2BUA actions are taking place along with AS service logic. The 100 Trying responses are not
15 shown in the diagram, but it is assumed that 100 Trying is sent in response to each INVITE request.

16 The B2BUA AS interacts with the UE as usual to establish the dialog. The B2BUA AS interacts with the
17 MRFC using a third party control model to establish the dialog. The B2BUA AS manages the interactions
18 between the two dialogs.

19 The offer/answer model as defined in IETF RFC 3264 [15] is used for SDP negotiation between the AS/S-
20 CSCF and the MRFC. The MRFC should always grant the requests from the AS (unless there is a resource
21 problem). The MRFC responds to the INVITE request with a 200 response indicating the selected codec in
22 the SDP. The MRFC will also reserve the requested local resources at that time. The selected codec is
23 included by the B2BUA AS in the 183 response to the UE. The receipt of the ACK at the MRFC triggers
24 the playing of the tone or announcement.

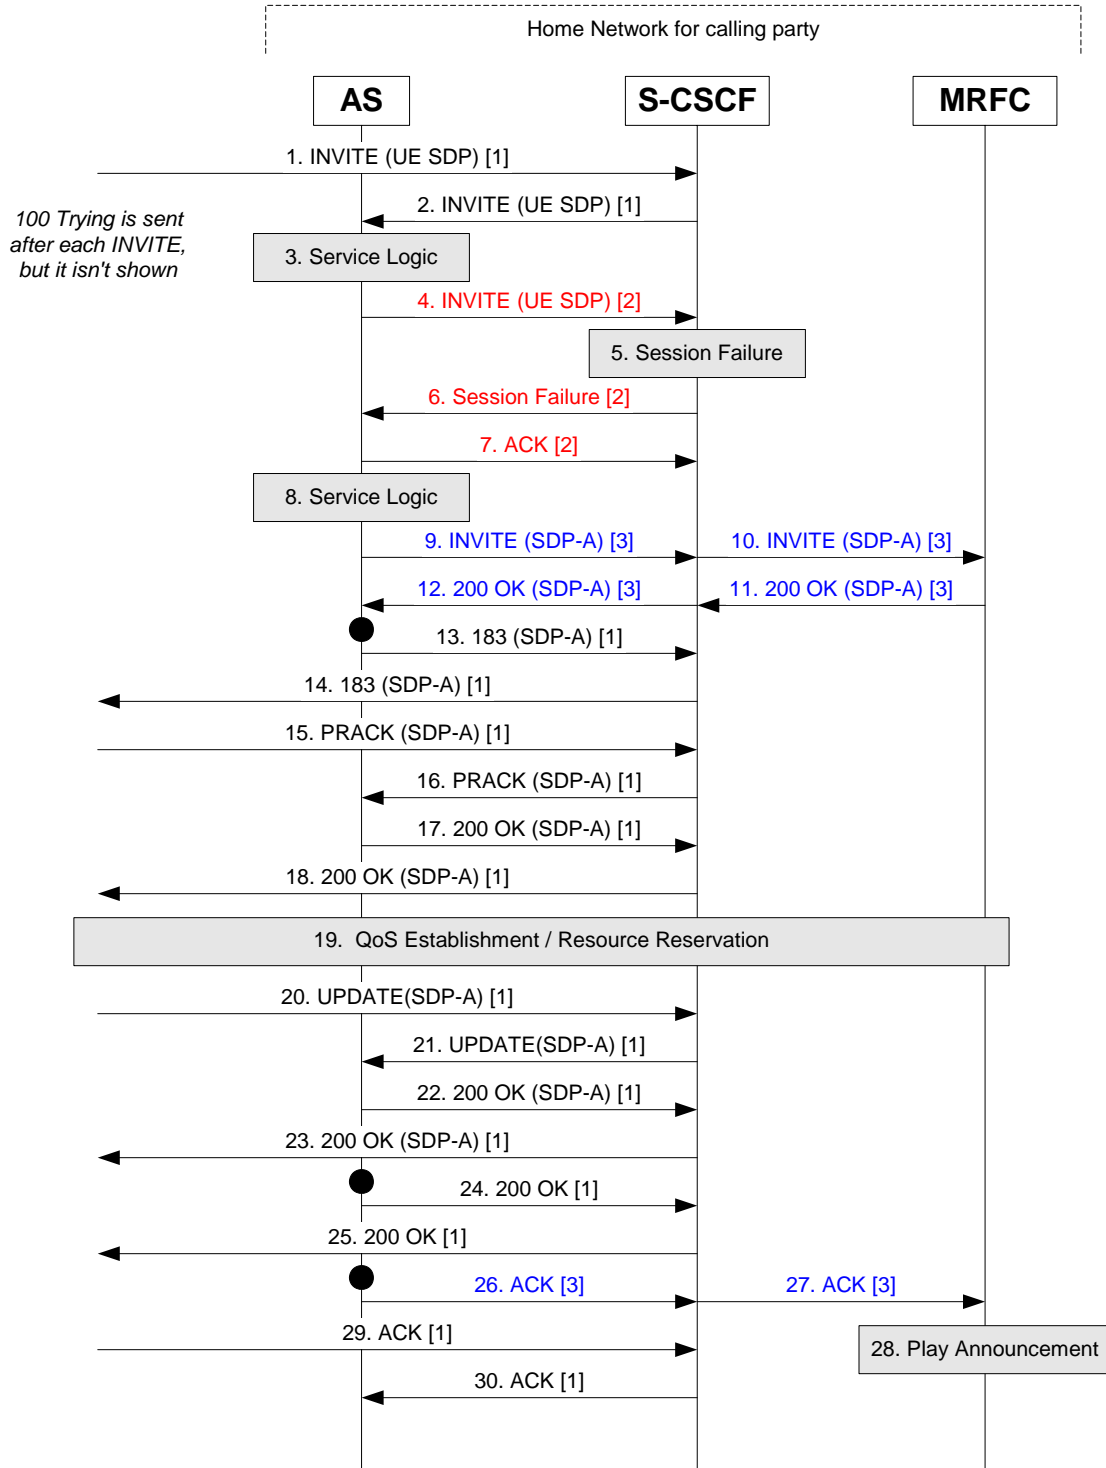


Figure B.2.1.1: Tones and announcements call flow

1
2
3
4
5

Notes for figure B.2.1.1:

- 1) INVITE request is received at the S-CSCF [Call-ID 1].
- 2) INVITE request is forwarded to an AS, based on the filter criteria.

- 1 3) The AS service logic determines to proceed with the call.
- 2 4) New INVITE request is sent towards destination, via the S-CSCF, to establish a new dialog [Call-
- 3 ID 2].
- 4 5) S-CSCF experiences a failure, such as not being able to determine the next hop for the SIP URI.
- 5 6) Session failure returned to the AS.
- 6 7) ACK returned to complete this dialog [Call-ID 2].
- 7 8) The AS service logic determines to play an announcement to the calling party.
- 8 9) New INVITE request is sent to the MRFC, via the S-CSCF, to establish a new dialog for playing
- 9 an announcement [Call-ID 3]. Sufficient information is included to specify the details for the
- 10 announcement.
- 11 10) S-CSCF relays INVITE to the MRFC.
- 12 11) The MRFC allocates the requested resource and returns 200 OK, with SDP-A indicating
- 13 selected media.
- 14 12) S-CSCF relays 200 OK to the AS.
- 15 13) - 30) The B2BUA AS manages the dialog for Call-ID 1 as normal, with the SDP-A supplied
- 16 from the MRFC. The MRFC is instructed to play the announcement using the ACK request at flow
- 17 26 for Call-ID 3.


18 **B.2.2 Example information flow for a mobile originated IP multimedia ad hoc**

19 **conferencing session (multiparty call)**

20 The following diagram shows an example of an ad hoc conference (multiparty call). An AS (acting as
 21 B2BUA) performs third party call control with the MRFC, where the S-CSCF is in the signalling path.
 22 The "[x]" notation in the diagram is an indicator of a unique SIP dialog. The "dot" notation on the AS line
 23 indicates B2BUA actions are taking place along with AS service logic. The 100 Trying responses are not
 24 shown in the diagram, but it is assumed that 100 Trying is sent in response to each INVITE request.
 25 The Application Server is in control of the ad hoc conference, is aware of the MRFC capabilities and is also
 26 operating as a B2BUA performing third party call control.

27 An INVITE request is generated from UE-1 indicating a desire to start a multiparty call (ad hoc conference)
 28 by taking the existing sessions, between UE-1 to UE-2 and UE-1 to UE-3, and bringing them together. The
 29 AS uses third party call control to request the conference facilities from the MRFC. A separate dialog is
 30 established from the AS to the MRFC for each of the three parties (UE-1, UE-2, UE-3). New dialogs are
 31 also established between the AS and each of the UE endpoints. The media from each UE is connected at
 32 the conferencing resource at the MRFP. The first INVITE request to the MRFC should receive a response
 33 that includes the conference identifier. The same conference identifier will be used for subsequent INVITE
 34 requests to add or drop parties to the conference.

35 The offer/answer model as defined in IETF RFC 3264 [15] is used for SDP negotiation between the AS/S-
 36 CSCF and the MRFC. The MRFC should always grant the requests from the AS (unless there is a resource
 37 problem). The MRFC responds to the INVITE request with a 200 response indicating the selected media in
 38 the SDP. The MRFC will also reserve the requested local resources at that time and return the appropriate
 39 resource identifiers in the 200 response.

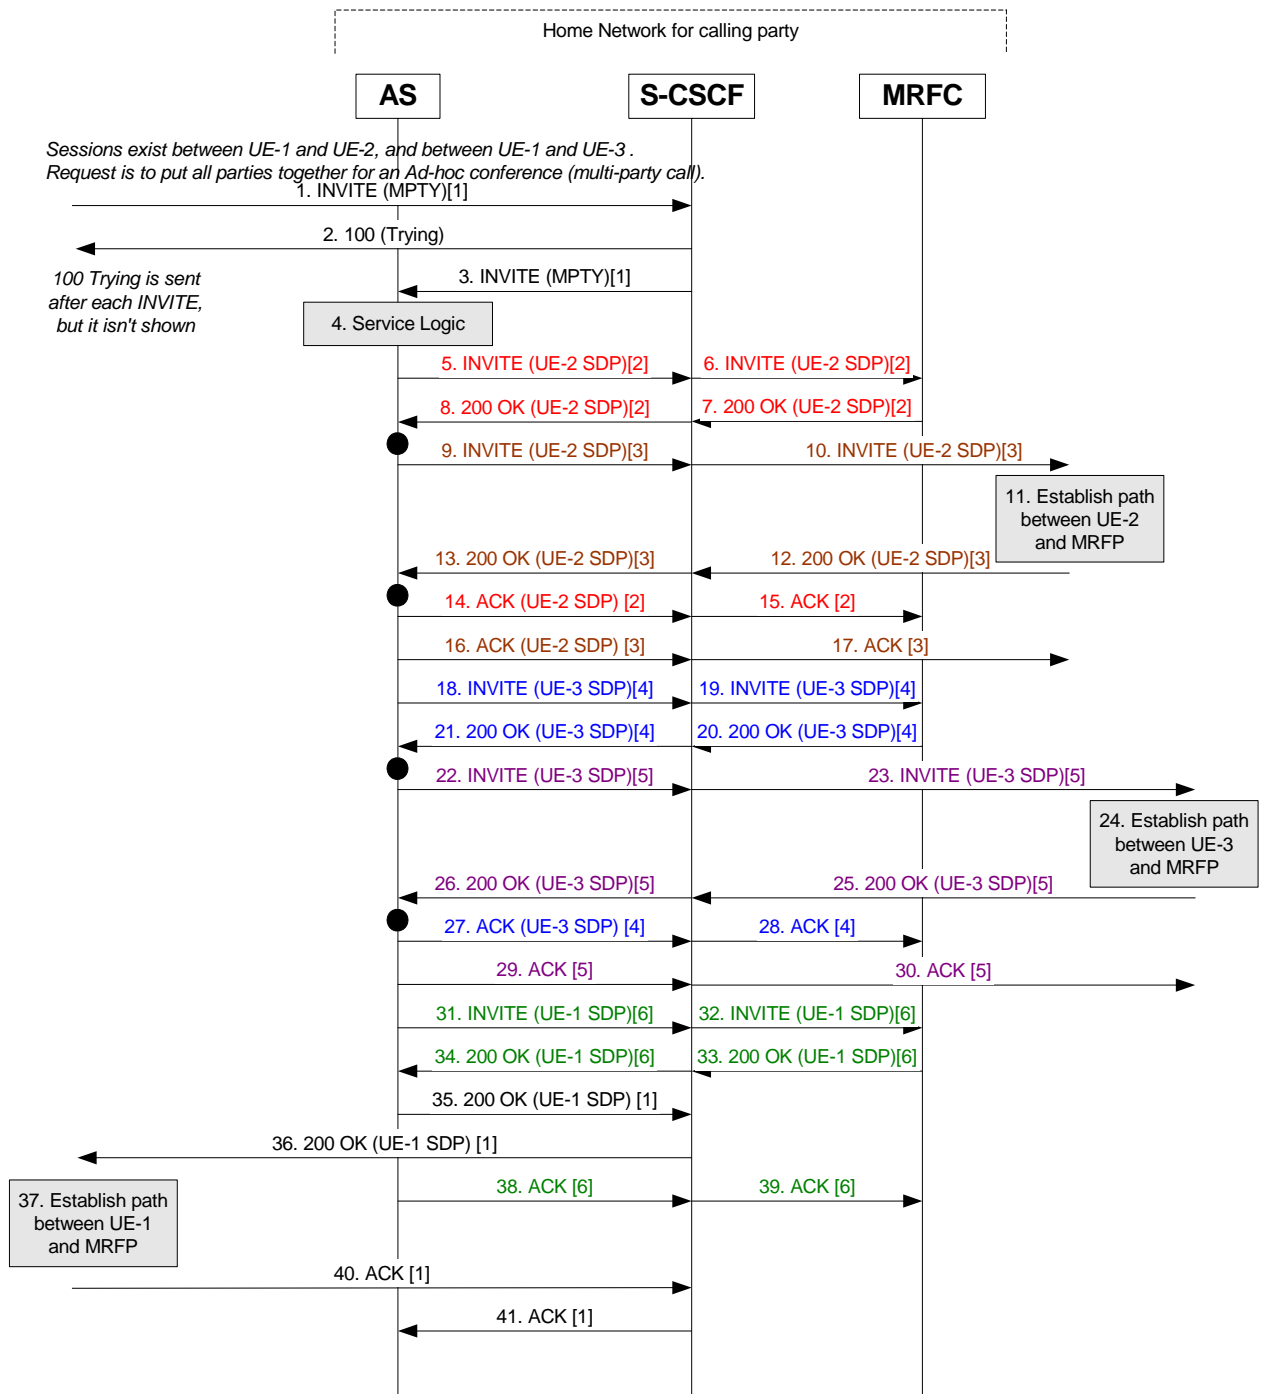

1
2

3

Figure B.2.2.1: Ad hoc conference call flow

4

Notes for figure B.2.2.1:

5

1) INVITE request received at S-CSCF from UE-1 indicating desire to start ad hoc conference (multiparty call) for the existing sessions between UE-1 to UE-2 and UE-1 to UE-3.

6

7

2) 100 Trying returned.


8

3) INVITE forwarded to AS.

- 1 4) AS performs service logic and allows attempt to start ad hoc conference.
- 2 5-8) New INVITE request sent to MRFC to initiate multiparty call, get conference identifier and
- 3 prepare dialog for UE-2 [Call-ID 2].
- 4 9-13) Re-INVITE sent to UE-2 to establish dialog between AS and UE-2 [Call-ID 3].
- 5 14-17) ACK sent for Call-ID 2 and Call-ID 3.
- 6 18-21) New INVITE request sent to MRFC using the same conference identifier and prepare dialog
- 7 for UE-3 [Call-ID 4].
- 8 22-26) Re-INVITE sent to UE-3 to establish dialog between AS and UE-3 [Call-ID 5].
- 9 27-30) ACK sent for Call-ID 4 and Call-ID 5.
- 10 31-34) New INVITE request sent to MRFC using the same conference identifier and prepare dialog
- 11 for UE-1 [Call-ID 6].
- 12 35-36) 200 OK returned to UE-1 with SDP.
- 13 37) The session is established.
- 14 38-41) ACK sent for Call-ID 1 and Call-ID 6.

15 **B.2.3 Example information flows for a mobile originated IP multimedia session that** 16 **requires transcoding**

17 The two figures B.2.3.1 and B.2.3.2 that follow illustrate the MRFC providing transcoding for a mobile
18 originated session, where the MRFC is receiving directions from the AS operating as a B2BUA.
19 The "[x]" notation in the diagram is an indicator of a unique SIP dialog. The "dot" notation on the AS line
20 indicates B2BUA actions are taking place along with AS service logic. The 100 Trying responses are not
21 shown in the diagram, but it is assumed that 100 Trying is sent in response to each INVITE request.
22 The B2BUA AS interacts with the originating UE as usual to establish the dialog. The B2BUA AS interacts
23 with the MRFC using a third party control model to establish the dialog with the called party after receiving
24 the initial failure indication. The B2BUA AS manages the interactions between the two dialogs.
25 An INVITE request is generated from a UE. A 606 "Not Acceptable" response is received from the called
26 party. The AS uses third party call control to request transcoding facilities from the MRFC. A separate
27 dialog is established from the AS to the MRFC for each of the two parties. New dialogs are also established
28 between the AS and each of the UE endpoints. The media from each UE is connected at the transcoding
29 resource at the MRFC.
30 In the first figure B.2.3.1 below, the called party returns an indication of an acceptable codec. For this case,
31 the request to the MRFC will include the appropriate codec for the called party and the offer/answer model
32 as defined in IETF RFC 3264 [15] with the MRFC is used. In figure B.2.3.2 below, the called party does
33 not indicate any SDP, which means that more steps will be required on the subsequent INVITE request to
34 set up transcoding with the MRFC. An INVITE without SDP is sent to the MRFC to get the list of codecs it
35 supports. The AS then sends that list of codecs in the new INVITE that it sends to the called party. The
36 B2BUA function of the AS matches up the responses.
37 The offer/answer model is used for SDP negotiation between the AS/S-CSCF and the MRFC. The MRFC
38 should always grant the requests from the AS (unless there is a resource problem). The MRFC responds to
39 the INVITE request with a 200 response indicating the selected codec in the SDP. The MRFC will also
40 reserve the requested local resources at that time. The selected codec is included by the B2BUA AS in the
41 183 response to the UE. The receipt of the ACK at the MRFC triggers the playing of the tone or
42 announcement.

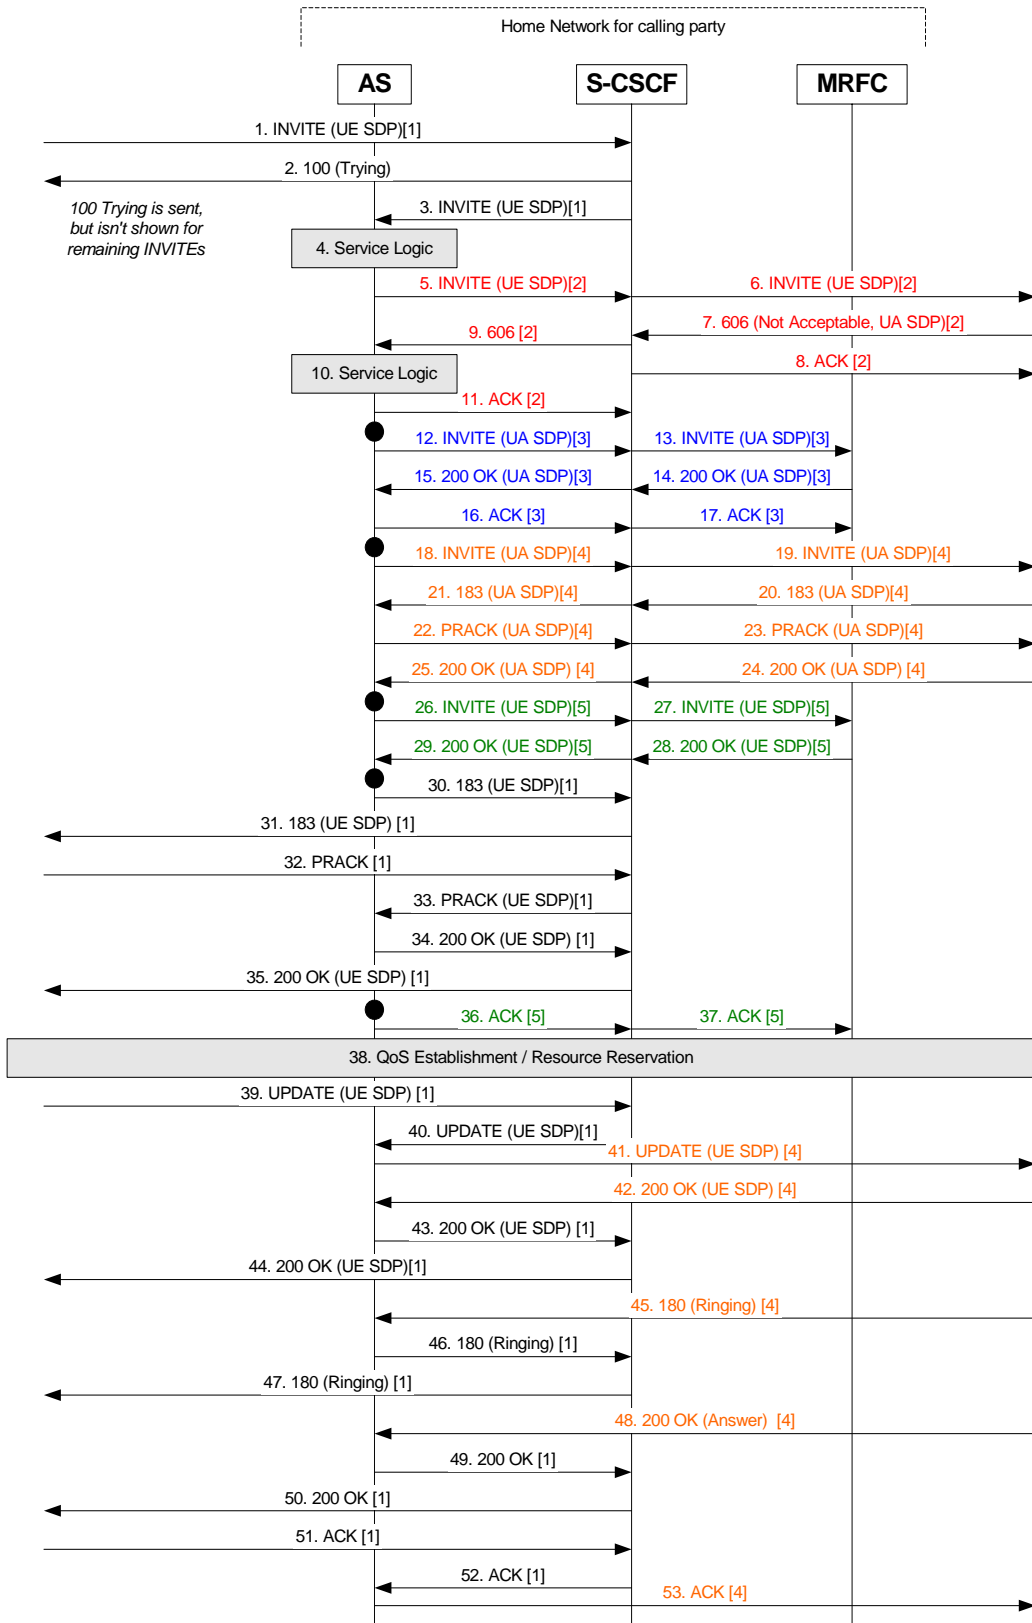

1
2

Figure B.2.3.1: Transcoding call flow (called party indicates codec)

- 1 Notes for figure B.2.3.1:
2 1) INVITE request received at S-CSCF from UE [Call-ID 1].
3 2) 100 Trying returned.
4 3) INVITE forwarded to an AS, based on filter criteria.
5 4) AS service logic determines to proceed with the call.
6 5) New INVITE request is sent towards destination, via the S-CSCF, to establish a new dialog [Call-
7 ID 2].
8 6) S-CSCF forwards the INVITE.
9 7) Called UA returns 606 Not Acceptable in response to the INVITE request. Included in the
10 response is an indicator that the offered codec is not acceptable plus information on what codec
11 would be acceptable.
12 8) An ACK is sent to the called UA to complete the dialog for Call-ID 2.
13 9) 606 response is forwarded to the AS.
14 10) AS service logic determines that there is an MRFC that can perform the transcoding.
15 11) ACK sent to S-CSCF to complete the dialog for Call-ID 2.
16 12-17) New INVITE request sent to MRFC to establish transcoding for called UA [Call-ID 3].
17 18-25) New INVITE request sent to called UA to establish session between UA and MRF [Call-ID
18 4].
19 26-29) New INVITE request sent to MRFC to establish transcoding for calling UE [Call-ID 5].
20 30-53) Normal call establishment procedures from here on, with B2BUA AS performing the
21 appropriate signalling translations between the associated dialogs.

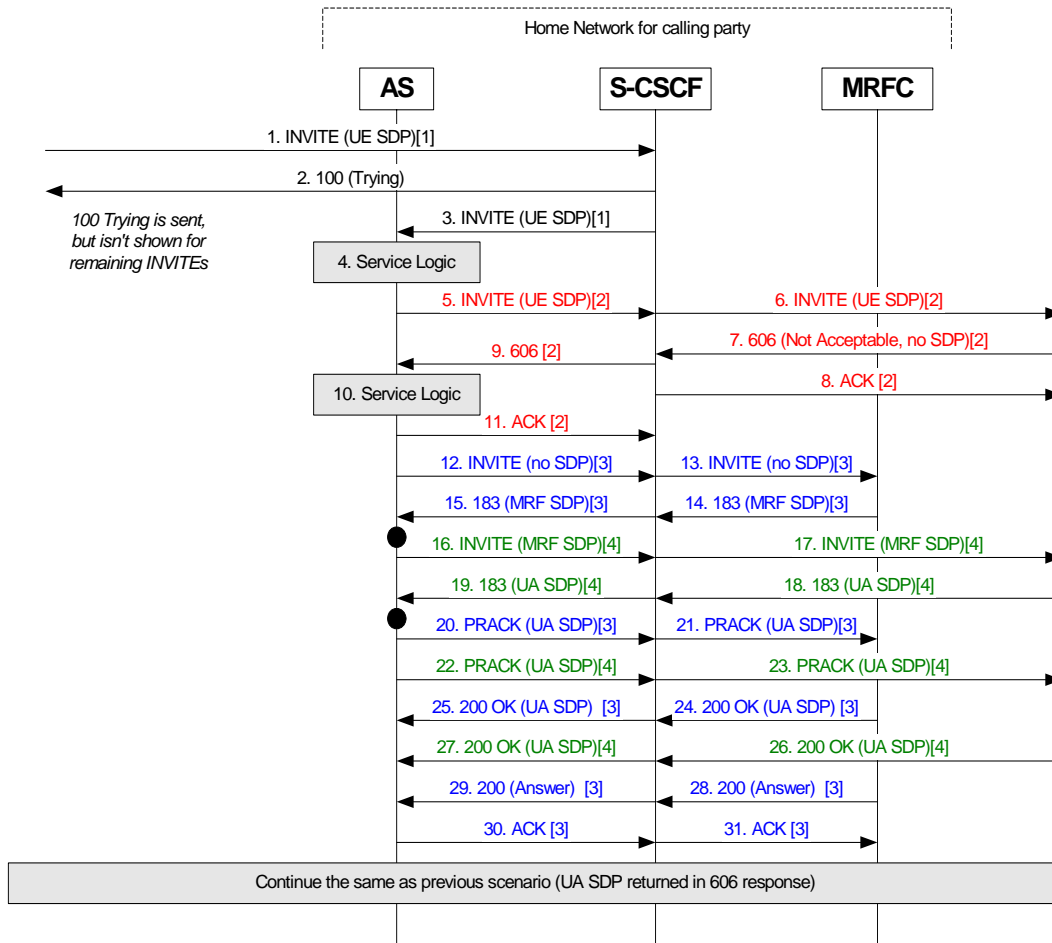


Figure B.2.3.2: Transcoding call flow (called party codec negotiated)

Notes for figure B.2.3.2:


- 1) INVITE request received at S-CSCF from UE [Call-ID 1].
- 2) 100 Trying returned.
- 3) INVITE forwarded to an AS, based on filter criteria.
- 4) AS service logic determines to proceed with the call.
- 5) New INVITE request is sent towards destination, via the S-CSCF, to establish a new dialog [Call-ID 2].
- 6) S-CSCF forwards the INVITE.
- 7) Called UA returns 606 Not Acceptable in response to the INVITE request. Included in the response is an indicator that the offered codec is not acceptable but there is no information on what codec would be acceptable (no SDP).
- 8) ACK sent to called UA to complete the dialog for Call-ID 2.
- 9) 606 response is forwarded to the AS.
- 10) AS service logic determines that there is an MRFC that can perform the transcoding.

- 1 11) ACK sent to S-CSCF to complete the dialog for Call-ID 2.
- 2 12-15) New INVITE request sent to MRFC to establish transcoding for called UA and to get the list
3 codecs supported by the MRF [Call-ID 3].
- 4 16-19) New INVITE request sent to called UA with SDP for all codecs supported by the MRF to
5 establish session between UA and MRF [Call-ID 4]. UA returns SDP with acceptable codecs.
- 6 20-27) A new offer with the codecs provided by the UA is sent in PRACK and the 200 OK response
7 indicates the selected codec.
- 8 28-31) Acknowledgements sent to complete Call-ID 3.
- 9 Call establishment procedures from here on are common with the previous transcoding call flow.

10 **B.3 Example information flows for a voicemail service**

11 **B.3.1 User out of coverage message recording**

- 12 Figure B.3.1.1 shows a possible scenario of an Application Server, which acting as a terminating UA
13 performs the function of a Voicemail Server in order to terminate a call and record a message on behalf of a
14 UE that is out of coverage or powered off.
- 15 A S-CSCF is forwarded the initial INVITE destined for a UE that is not currently IMS registered. The
16 Default Filter Criteria in the S-CSCF indicates that for the case of an unregistered user the INVITE should
17 be forwarded to the Voicemail and Announcement Server.
- 18 Upon receiving the INVITE request the Voicemail and Announcement Server determines that the
19 destination UE has subscribed to the Voicemail Service (possibly by downloading some subscriber profile
20 information via the Sh interface). The Voicemail and Announcement Server therefore in addition to playing
21 an announcement to inform the caller that the called party is either powered off or out of coverage also
22 informs the caller that he may leave a message for the called party.
- 23 The calling party leaves a message for the called party and then hangs up the call by sending a BYE.

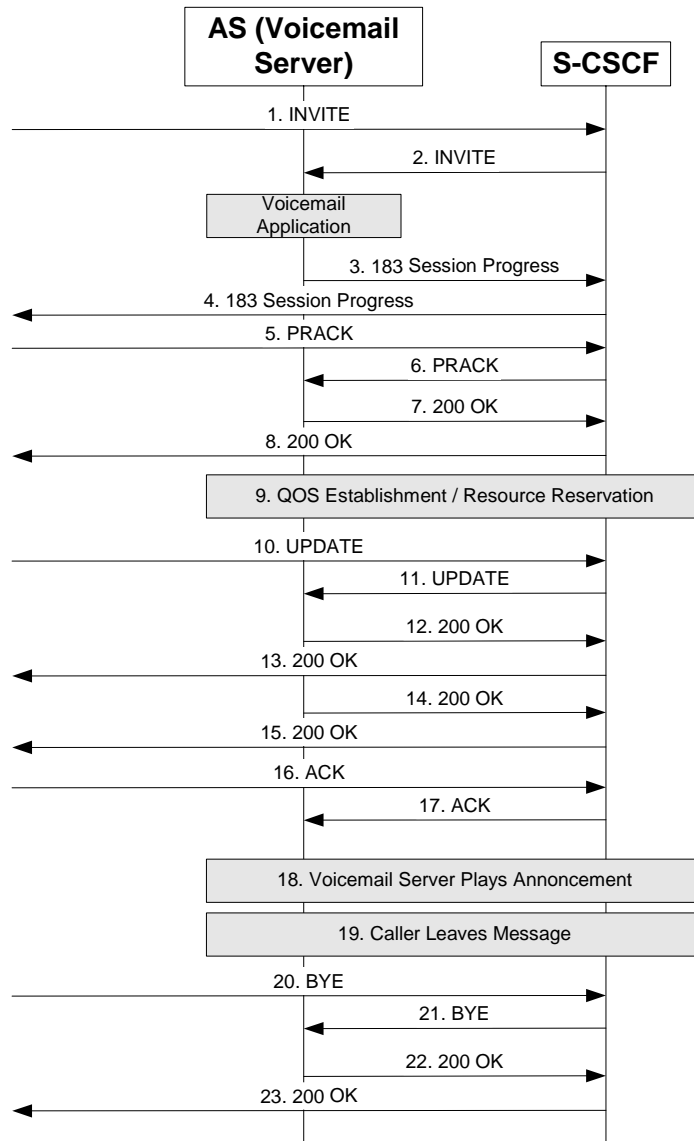

1
2

3

Figure B.3.1.1: Voicemail server records messages

4 Notes for figure B.3.1.1:

5 NOTE: For simplicity the 100 Trying response returned or received by the S-CSCF in response to
6 requests is omitted from figure B.3.1.1.

7 1) INVITE request destined for an unregistered user is received at the S-CSCF.

8 2) Based on trigger point of the initial Filter Criteria S-CSCF proxies the INVITE request to the AS
9 (Voicemail Server).

10 3-4) The AS starts the voicemail application and responds with a 183 Session Progress containing
11 SDP which is proxied back to the caller by the S-CSCF.

1 5-8) The caller responds with a PRACK containing SDP, which the S-CSCF proxies to the AS and
2 the AS responds with a 200 OK containing SDP which the S-CSCF proxies back to the caller.

3 QOS establishment and resource reservation takes place.

4 10-13) After completing resource reservation the caller sends a UPDATE containing SDP which is
5 proxied by the S-CSCF to the AS which responds with a 200 OK containing SDP which is proxied
6 back to the caller by the S-CSCF.

7 14-15) The AS then sends a 200 OK to the initial INVITE which the S-CSCF proxies to the caller.

8 16-17) The caller returns an ACK to the 200 OK.

9 18) The AS plays an announcement using the session established indicating that the caller is
10 powered off but that the caller may leave a message.

11 19) The caller leaves a message using the session established.

12 20-21) The caller hangs up by sending a BYE which the S-CSCF proxies to the AS.


13 22-23) The AS responds with a 200 OK, which the S-CSCF proxies back to the caller.

14 **B.3.2 User IMS registers voice mail service plays back messages**

15 Figure B.3.2.1 shows the scenario when the UE that has subscribed to a voicemail service with a feature
16 enabled that contacts the user upon registration informing him of any recorded messages.

17 The Filter Criteria downloaded by the S-CSCF indicates that a third party REGISTER request should be
18 sent to the Voicemail Server. Upon receiving the third party registration of the UE, the Voicemail Server
19 acting as an originating UA contacts the UE by sending an INVITE request to inform him that he has
20 voicemail messages recorded while he was not registered.

21 The user listens to the messages played back by the voicemail server, (only streaming class QOS is
22 required for this session) and then terminates the session with a BYE.

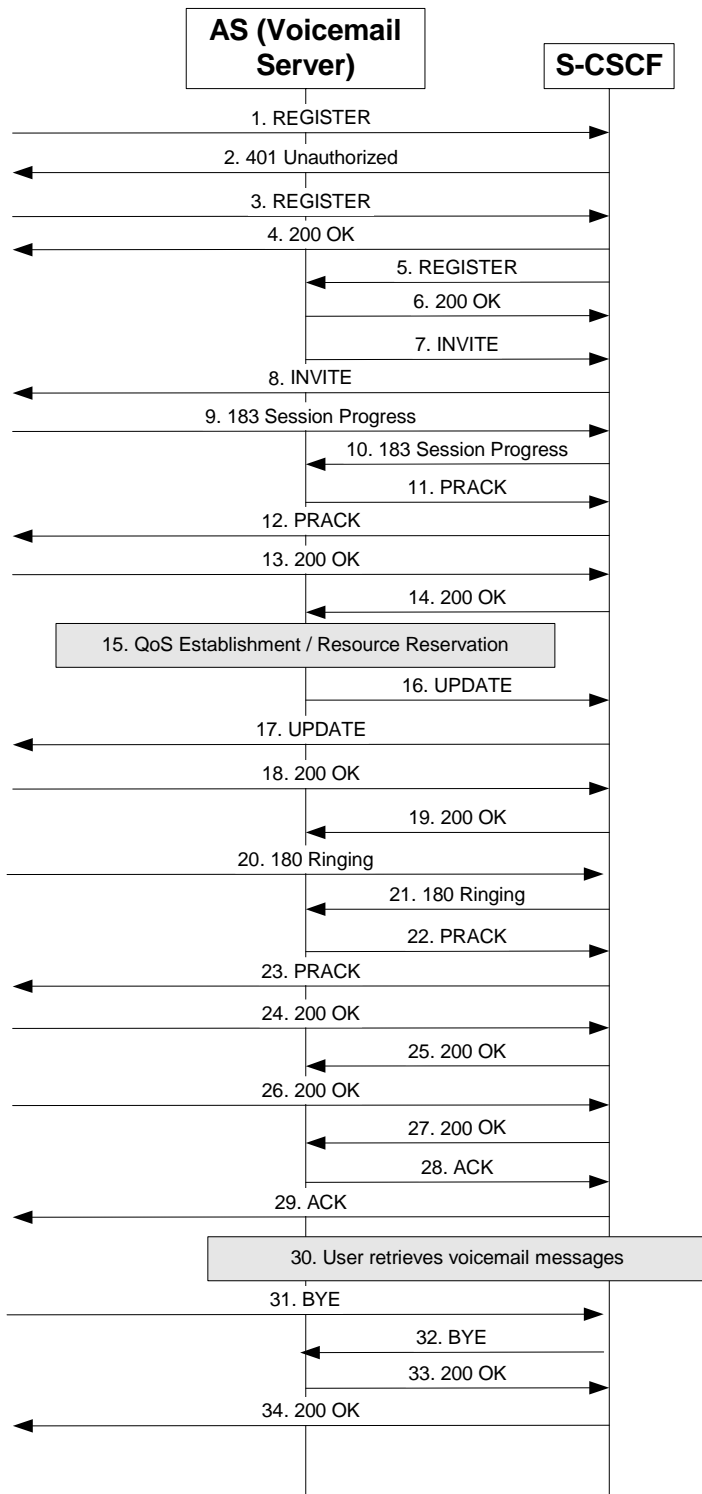

1
2
3

Figure B.3.2.1: Upon registration voicemail server replays messages

1 Notes for figure B.3.2.1:

2 NOTE: For simplicity the 100 Trying response returned or received by the S-CSCF in response to
3 requests is omitted from figure B.3.2.1.

4 1-4) The UE sends a REGISTER request to the S-CSCF which authenticates with a 401
5 Unauthorized response challenge with the authentication response being supplied in a second
6 REGISTER request. The registration completes with a 200 OK from the S-CSCF to the UE.

7 5-6) The S-CSCF downloads Filter Criteria for the UE from the HSS which indicates the S-CSCF
8 should send a third party REGISTER request on behalf of the UE to an AS that performs a
9 voicemail service. The AS responds to the REGISTER request with a 200 OK.

10 7- 8) The AS downloads subscriber data for the subscriber (possibly from the HSS via the Sh
11 interface) that indicates that the subscriber has enabled a feature that has the voicemail application
12 contact the subscriber upon registration to deliver recorded messages. The AS sends an INVITE
13 request containing SDP for the UE to the S-CSCF which proxies it to the UE.

14 9-10) The UE responds with 183 Session Progress containing SDP which the S-CSCF proxies to the
15 AS.

16 11-14) The AS sends a PRACK, which the S-CSCF proxies to the UE and the UE respond with a
17 200 OK which the S-CSCF proxies to the AS.

18 15) QOS establishment and resource reservation takes place.

19 16- 19) The AS sends an UPDATE, which the S-CSCF proxies to the UE and the UE responds with
20 a 200 OK which the S-CSCF proxies to the AS.

21 20-21) The UE sends a 180 Ringing indicating that it is alerting the user which the S-CSCF proxies
22 to the AS.

23 22-25) The AS to indicate receipt of the 180 response sends a PRACK which the S-CSCF proxies to
24 the UE and the UE responds with a 200 OK which the S-CSCF proxies to the AS.

25 26-27) When the subscriber answers the UE sends a 200 OK to the initial INVITE which the S-
26 CSCF proxies to the AS.

27 28-29) The AS acknowledges the 200 OK with an ACK which the S-CSCF proxies to the UE.


28 30) The AS plays an announcement indicating the number of messages stored and then plays back
29 the messages to the UE using the session established.

30 31-32) The UE hangs up by sending a BYE, which the S-CSCF proxies to the AS.

31 33-34) The AS responds with a 200 OK, which the S-CSCF proxies back to the UE.

1 Annex C (informative): 2 Example for Initial filter criteria triggering

3 This example applies for call originating and terminating procedure both. But we assume this is a call
4 originating procedure. User has registered with the network. Its filter criteria and addresses of the assigned
5 application servers have been downloaded to its S-CSCF during registration via Cx interface. Also, the
6 application server specific data may have been downloaded via the Sh interface to the application server
7 during registration.

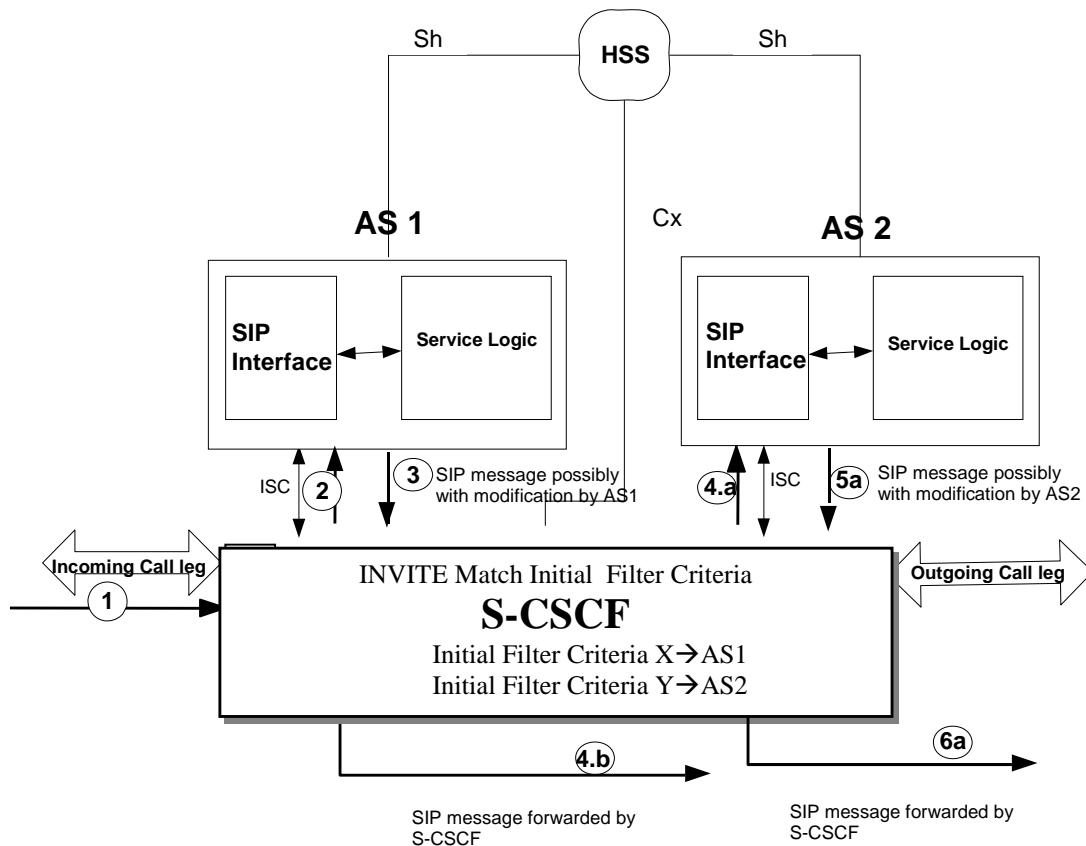

8

9

Figure C.1: Initial Filter Criteria Triggering Example

- 10 There is a flow example in figure C.1:
11 In this example, two application servers are assigned to provide additional services to a subscriber and they
12 are shown as AS1 and AS2 in this example.
- 13 1. User initiates a SIP session by sending a SIP initial request to its S-CSCF.
 - 14 2. On receiving this request, the S-CSCF evaluates the SPTs and checks if they match the initial filter
15 criteria X for AS1. If they match, the S-CSCF forwards this request to AS1.
 - 16 3. The AS1 performs any needed service logic based on the Service and sends the SIP request possibly
17 with service related modification back to the S-CSCF.
 - 18 4.a On receiving the request from the AS, the S-CSCF evaluates the SPTs and checks if they match the
19 initial filter criteria Y for AS2. If they match the S-CSCF forwards the request to the associated
20 Application Server AS2.

- 1 4.b If the request doesn't match any further filter criteria, the S-CSCF forwards this request to the next
- 2 hop based on the route decision.

- 3 5.a The AS2 performs any needed service logic based on the Service and sends the SIP request possibly
- 4 with service related modification back to the S-CSCF.

- 5 6.a The S-CSCF checks the request sent by AS2 and finds that no initial criteria is matched, then the S-
- 6 CSCF forwards this request to next hop based on the route decision.

- 7